SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION: SKOOKUM RANCH PROJECT

MASON COUNTY, WASHINGTON

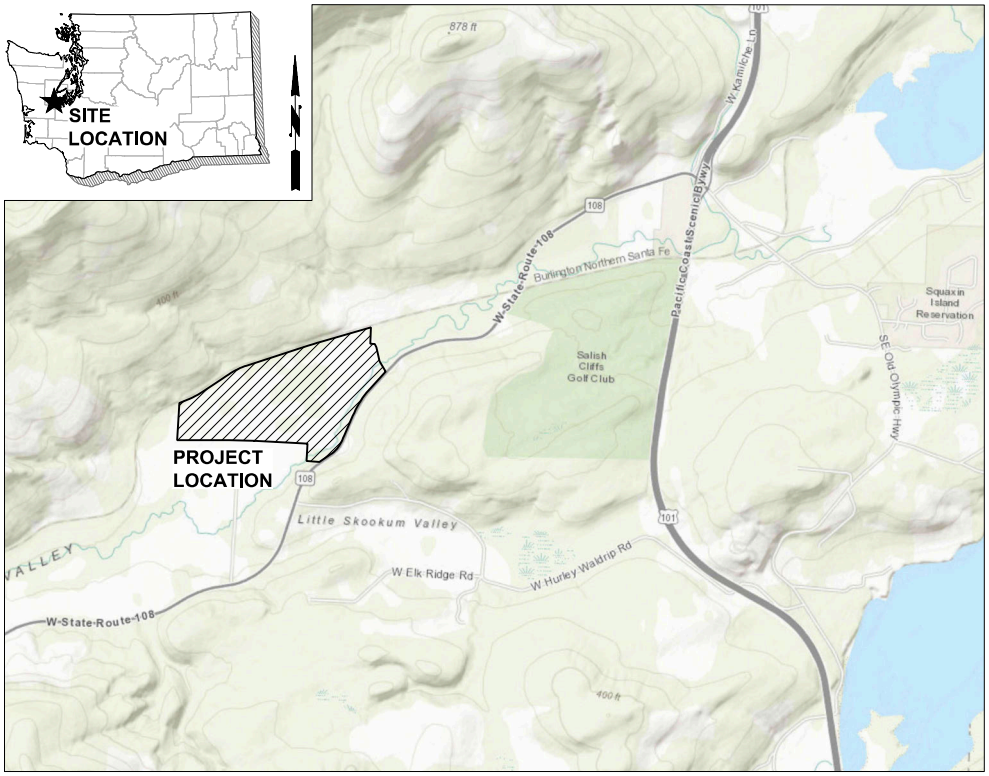

VICINITY MAP

SCALE: 1"=1/4 MILE

OWNER:

SQUAXIN ISLAND TRIBE
200 SE BILLY FRANK JR. WAY
SHELTON, WA 98584
PHONE: (360) 432-3803
EMAIL: ssteltzner@squaxin.us
CONTACT: SCOTT STELTZNER

ENGINEER:

HERRERA ENVIRONMENTAL CONSULTANTS
2200 SIXTH AVENUE
SUITE 1100
SEATTLE, WA 98121
PHONE: (206) 441-9080
EMAIL: imostrenko@herrerainc.com
CONTACT: IAN MOSTRENKO, PE

SHEET INDEX

SHEET NO	DWG	DESCRIPTION
1	G0.01	COVER SHEET
2	G0.02	ABBREVIATIONS, LEGEND, AND NOTES
3	C1.00	EXISTING CONDITIONS
4	C1.10	OVERALL SITE PLAN AND SCHEDULE PHASES
5	C2.01	SITE DEMOLITION AND TREE PROTECTION PLAN
6	C2.02	TREE PROTECTION DETAILS
7	C2.10	ACCESS AND STAGING PLAN
8	C2.11	TESC AND WATER ISOLATION PLAN
9	C2.12	POND DEWATERING AND OUTLET PLAN
10	C2.20	WATER MANAGEMENT DETAILS 1
11	C2.21	WATER MANAGEMENT DETAILS 2
12	C3.01	SITE MAP 1
13	C3.02	SITE MAP 2
14	C3.03	SITE MAP 3
15	C3.04	SITE MAP 4
16	C3.05	SITE MAP 5
17	C3.06	SITE MAP 6
18	C3.10	PROFILES AND SECTIONS 1
19	C3.11	PROFILES AND SECTIONS 2
20	C3.12	PROFILES AND SECTIONS 3
21	C3.13	PROFILES AND SECTIONS 4
22	C3.14	PROFILES AND SECTIONS 5
23	C3.15	PROFILES AND SECTIONS 6
24	C3.16	PROFILES AND SECTIONS 7
25	C3.17	PROFILES AND SECTIONS 8
26	C4.01	CHANNEL DETAILS
27	C4.10	ELS DETAILS 1
28	C4.11	ELS DETAILS 2
29	C4.12	ELS DETAILS 3
30	C4.20	SITE DETAILS 1
31	L1.01	PLANTING PLAN
32	L1.10	RESTORATION SEEDING PLAN

MERIDIAN
NAD 83 (HARN) WA S
DATUM
NAVD 88

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH, SCALE ACCORDINGLY
AT FULL SIZE

HERRERA
Science + Planning + Design
herrerainc.com

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION
SKOOKUM RANCH PROJECT

COVER SHEET

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: G0.01
SHEET NO: 1 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet\Cover.dwg | 9/2/2026 8:35 AM | Eric Marshall

ABBREVIATIONS

APPROX	APPPROXIMATE
AVG	AVERAGE
BDA	BEAVER DAM ANALOG
BMP	BEST MANAGEMENT PRACTICE
CF	CUBIC FOOT/FEET
CG	CLEAR AND GRUB
C/L, CL	CENTERLINE
CONST	CONSTRUCT, CONSTRUCTION
CP	CONTROL POINT
CY	CUBIC YARDS
DIA, Ø	DIAMETER
DWG	DRAWING
E	EAST, EASTING
EA	EACH
EG	EXISTING GROUND
EL	ELEVATION
ELS	ENGINEERED LOG STRUCTURE
EX	EXISTING
FG	FINISHED GROUND
FT	FEET/FOOT
HOR	HORIZONTAL
HT	HEIGHT
IN	INCH/INCHES
L	LENGTH
LF	LINEAL FOOT/FEET
LT	LEFT
MAX	MAXIMUM
MIN	MINIMUM
N	NORTH/NORTHING
NA	NOT APPLICABLE
NO	NUMBER
NTS	NOT TO SCALE
OC	ON CENTER
OHW	ORDINARY HIGH WATER
QTY	QUANTITY
RCG	REED CANARY GRASS
REF	REFERENCE
RT	RIGHT
S	SOUTH, SLOPE
SPEC	SPECIFICATION
SR	STATE ROUTE
STA	STATION
STD	STANDARD
TEMP	TEMPORARY
TESC	TEMPORARY EROSION AND SEDIMENT CONTROL
TYP	TYPICAL
W	WEST, WATER
WSDOT	WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
WSE	WATER SURFACE ELEVATION

LEGEND - EXISTING

- PARCEL LINE
- ORDINARY HIGH WATER
- APPROX 100 YEAR WATER SURFACE ELEVATION
- SURVEYED WETLAND
- ESTIMATED WETLAND
- FLOW DIRECTION
- RAILROAD
- CREEK CHANNEL CENTERLINE
- APPROX POND BATHYMETRY EXTENTS
- DITCH
- FENCE
- CULVERT
- BEAVER DAM

LEGEND - PROPOSED

- PROJECT LIMITS
- DISTURBANCE LIMITS
- GRAVEL RIFFLE
- MEANDER GRAVEL BAR
- SHALLOW BURIED HYPORHEIC STORAGE BASIN
- DEEP BURIED HYPORHEIC STORAGE BASIN
- BURIED HYPORHEIC CHANNEL
- HYDRAULIC CONNECTIVITY GRADING AREA
- CONSTRUCTION STAGING AREA
- CONSTRUCTION STAGING AND POTENTIAL STOCKPILE AREA
- WATTLES
- WORK AREA ISOLATION DAM
- TREE PROTECTION FENCE
- STABILIZED CONSTRUCTION ENTRANCE
- TEMPORARY 5-YEAR ACCESS ROAD
- TEMPORARY SUMMER ACCESS ROAD
- EXISTING SKOOKUM CREEK ACCESS ROUTE
- REMOVE FENCE
- REMOVE TREE
- MISCELLANEOUS ITEM REMOVAL
- TYPE 1 ELS
- TYPE 2 ELS
- TYPE 3 ELS
- TYPE 4 ELS
- TYPE 5 ELS
- TYPE 6 ELS
- BEAVER DAM ANALOG (BDA)

1 / C3,01 — REFERENCE NUMBER; SHEET WHERE REFERENCE APPEARS

DETAIL (PROFILE) SCALE: NTS — 1 (A) / C3,01 — REFERENCE NUMBER (LETTER); SHEET WHERE REFERENCE APPEARS

A / C2,01 — REFERENCE LETTER; SHEET WHERE REFERENCE APPEARS

A — SECTION SHOWN ON SAME SHEET

" - " INDICATES THAT THE DETAIL IS SHOWN ON THE SAME SHEET OR IS A TYPICAL DETAIL

"VAR" SPECIFIES THAT DETAIL/SECTION WAS TAKEN FROM VARIOUS DRAWINGS

DETAIL/SECTION REFERENCING

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH — AT FULL SIZE. IF NOT ONE INCH SCALE ACCORDINGLY

HERRERA Science + Planning + Design herrerainc.com

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

ABBREVIATIONS, LEGEND, AND NOTES

DATE: AUGUST 2026

PROJECT NO: 24-08417-000

DRAWING NO: G0.02

SHEET NO: 2 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-Proj\24-08417-000\CAD\Sheet\Notes_leg_abbr.dwg | 8/2/2026 9:35 AM | Eric Marshall

NOTES

1. TOPOGRAPHIC CONTOURS OUTSIDE OF THE APPROXIMATE POND BATHYMETRY LIMITS WERE GENERATED FROM 2019 LIDAR DATA.
2. TOPOGRAPHIC CONTOURS FOR THE BATHYMETRY OF THE POND ARE APPROXIMATE AND GENERATED FROM A SURFACE PROVIDED BY SOUTH PUGET SOUND SALMON ENHANCEMENT GROUP (SPSSEG). THE POND BATHYMETRIC SURFACE WAS CREATED FROM AN INTERPOLATION OF NON-SURVEY GRADE GPS SPOT LOCATIONS WITH CORRESPONDING DEPTH MEASUREMENTS, 2019 LIDAR DATA, AND FIELD OBSERVATIONS.
3. WETLAND BOUNDARIES AND OHW DELINEATIONS WERE DELINEATED BY HERRERA AND SURVEYED BY SPSSEG.

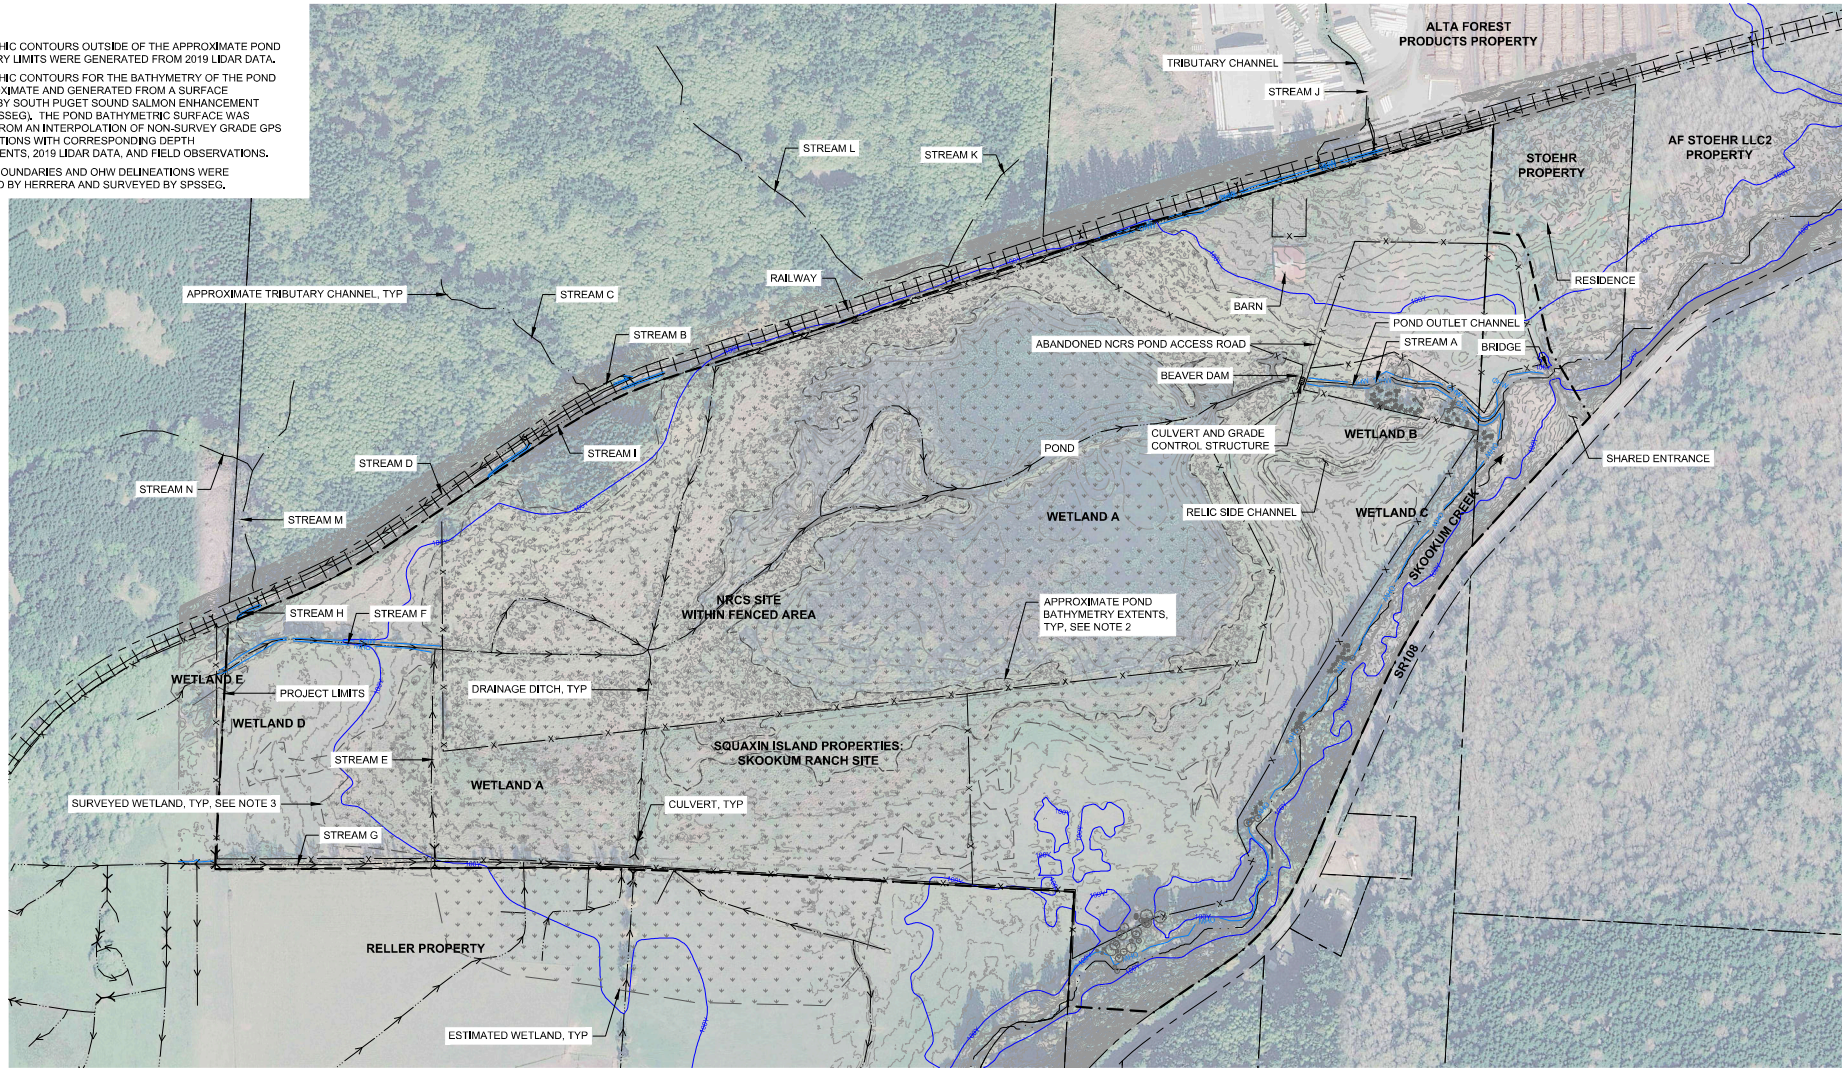

200 0 200 400
1"=200'

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

IF THIS BAR IS NOT ONE INCH AT FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

HERRERA
Science + Planning + Design
herrerainc.com

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

EXISTING CONDITIONS

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C1.00
SHEET NO: 3 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\TZ-T-X-T\24-8xxx\24-08417-000\CAD\Sheet\existing.dwg | 9/2/2026 9:36 AM | Eric Marshall

NOTES:

1. PHASED PROJECT CONSTRUCTION OVER MULTIPLE YEARS IS ANTICIPATED. THE PHASING PLAN WAS DEVELOPED BASED ON ANTICIPATED CONSTRUCTION FUNDING FOR PHASE 1 WITH SUBSEQUENT PHASES DEVELOPED BASED ON ANTICIPATED CONSTRUCTION LOGISTICS.
2. PHASING AREA BOUNDARIES SHOW LIMITS FOR EARTHWORK AND ENGINEERED LOG STRUCTURES CONSTRUCTION, STAGING, STOCKPILING, AND ACCESS ROUTES BEYOND THE SHOWN PHASING BOUNDARIES MAY BE USED DURING MULTIPLE PHASES, SEE DWG C2.10 FOR DETAILS.
3. FINAL RESTORATION PLANTINGS WITHIN EACH PHASE BOUNDARY WILL BE IMPLEMENTED BY A PLANTING CONTRACTOR ON A SEPARATE SCHEDULE BASED ON AVAILABLE FUNDING, SEE DWG L1.01 FOR DETAILS. AREAS DISTURBED DURING CONSTRUCTION WILL BE STABILIZED BY THE CONTRACTOR AT THE END OF EACH CONSTRUCTION PHASE, SEE DWG L1.10 FOR DETAILS.
4. PHASES AS SHOWN IN THESE PLANS MAY BE COMBINED, SPLIT OR MODIFIED BASED ON AVAILABLE FUNDING AND OR STAKEHOLDER AND PARTNER PRIORITIES.
5. BURIED HYPORHEIC STORAGE BASINS HAVE BEEN STRATEGICALLY PLACED SUCH THAT THEY CAN BE CONSTRUCTED SEPARATELY IN OTHER PHASES. THE FIRST HYPORHEIC BASIN(S) TO BE CONSTRUCTED WILL BE MONITORED TO DETERMINE THEIR EFFECTIVENESS AND IF ADDITIONAL BASINS SHOULD BE INCLUDED IN LATER PHASES.
6. EXCAVATED NATIVE MATERIAL FROM EARLY PHASES OF CONSTRUCTION MAY BE REQUIRED TO BE STOCKPILED ONSITE FOR THE CONSTRUCTION OF HUMMOCKS, OR OFFSITE DISPOSAL, DURING LATER PHASES OF THE PROJECT, SEE DWG C2.10 FOR ANTICIPATED OVERWINTER STOCKPILE LOCATIONS.

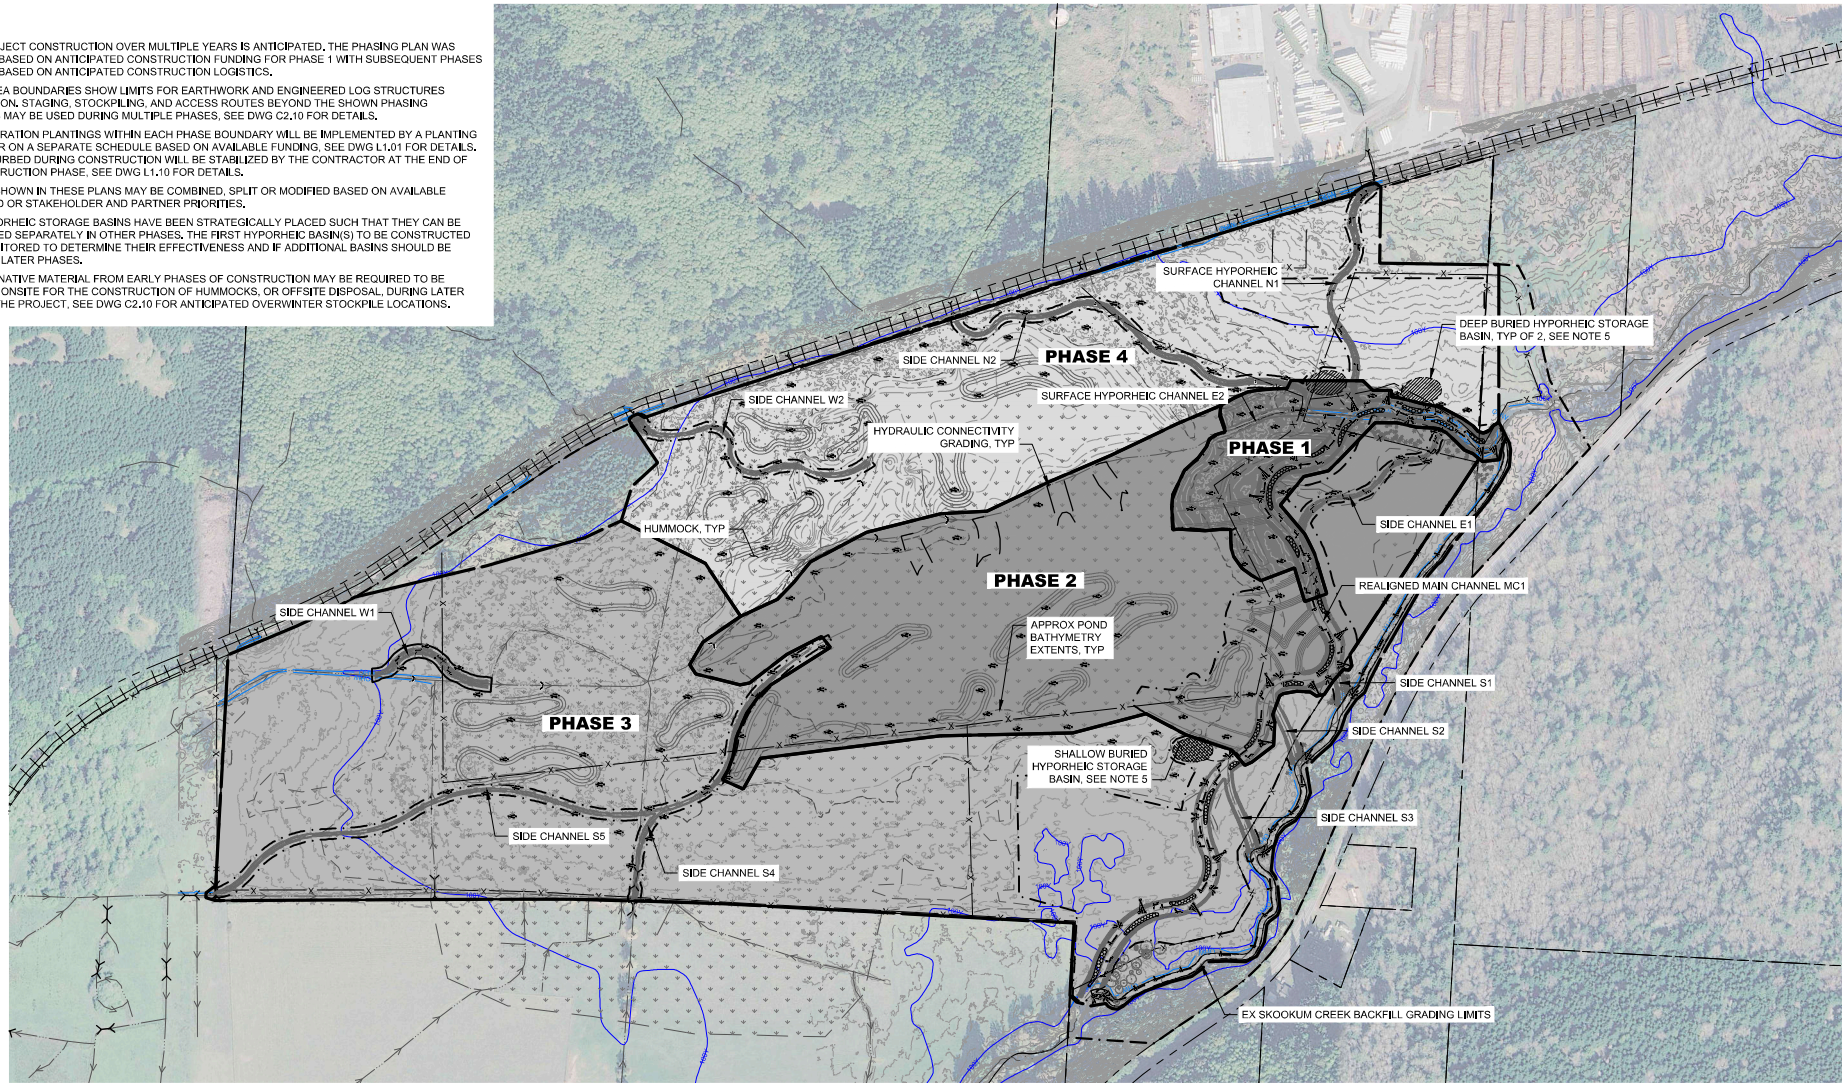

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH SCALE ACCORDINGLY
AT FULL SIZE, IF NOT ONE

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

OVERALL SITE PLAN AND SCHEDULE PHASES

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C1.10
SHEET NO: 4 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet\Site-overall.dwg | 8/2/2026 8:36 AM | Eric Marshall

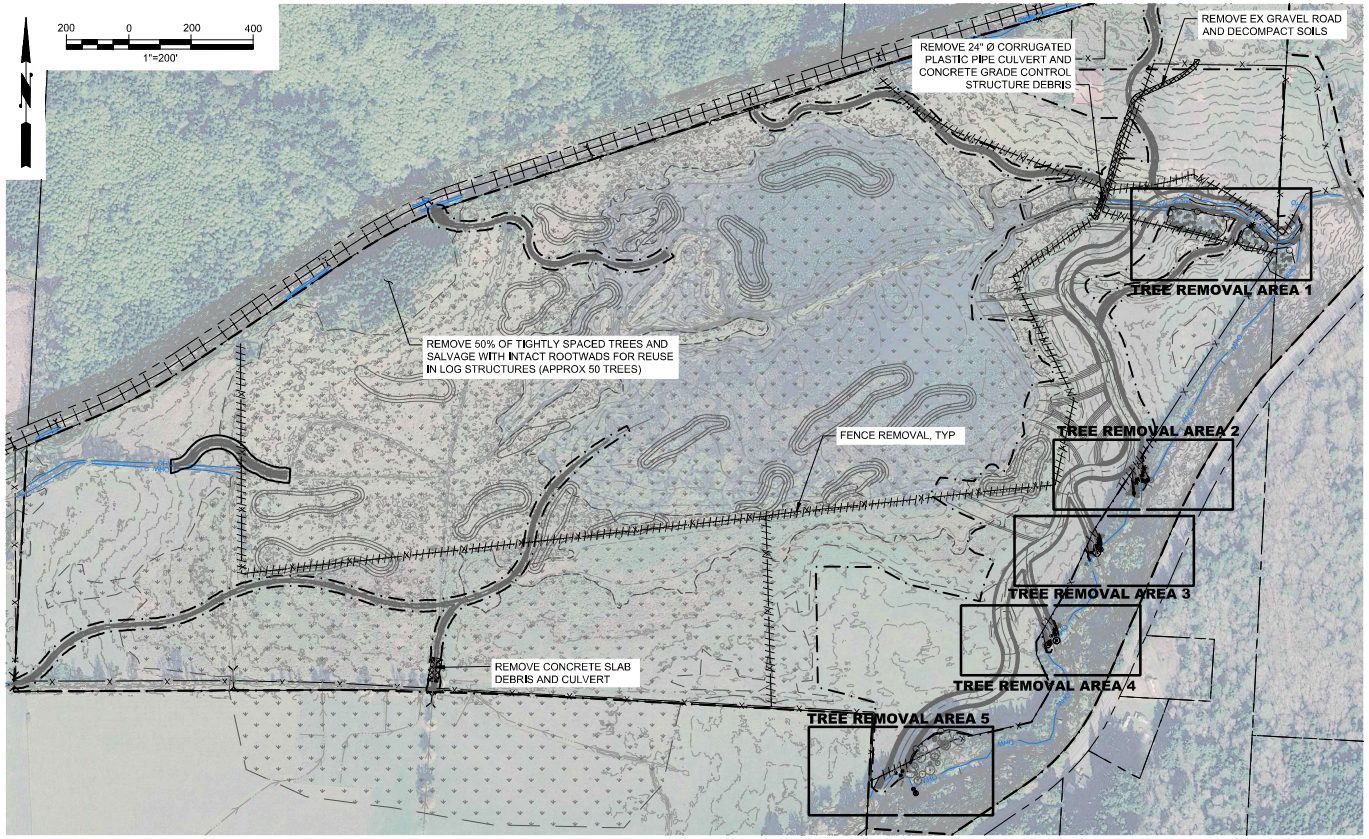

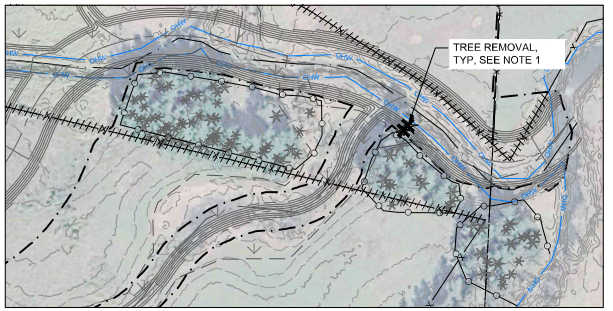

TREE REMOVAL AREA 1

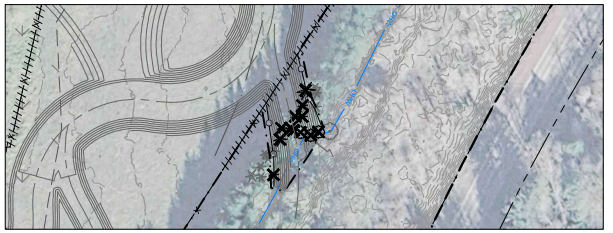

TREE REMOVAL AREA 2

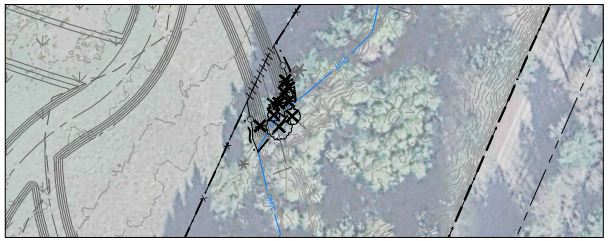

TREE REMOVAL AREA 3

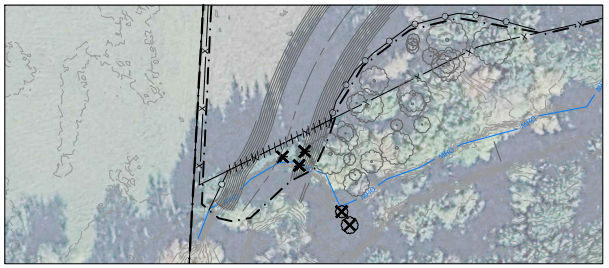

TREE REMOVAL AREA 5

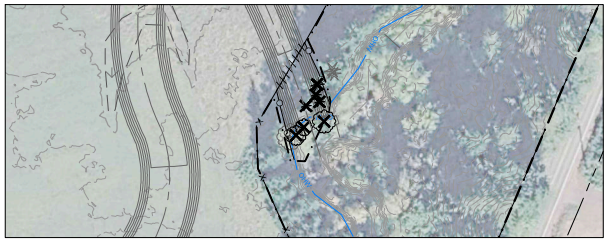

TREE REMOVAL AREA 4

NOTES

1. REMOVE TREES AND SALVAGE WITH INTACT ROOTWADS FOR REUSE IN LOG STRUCTURES. ALL TREES MARKED FOR REMOVAL SHALL BE FLAGGED BY THE CONTRACTOR AND APPROVED FOR REMOVAL BY THE ENGINEER. ENGINEER MAY DIRECT CONTRACTOR TO CUT SOME TREES FLUSH TO THE GROUND FOR REMOVAL WHERE THEY ARE CLOSE TO TREES TO BE PROTECTED TO PREVENT DAMAGE TO ROOTS.
2. SEE DWG C2.02 FOR TREE PROTECTION DETAILS.

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH AT FULL SIZE. IF NOT ONE INCH, SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL	SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION	DATE: AUGUST 2026
DESIGNED: D. CORTESE	DRAWN: -	SKOOKUM RANCH PROJECT	PROJECT NO: 24-08417-000
DESIGNED: -	CHECKED: I. MOSTRENKO		DRAWING NO: C2.01
SCALE: AS NOTED	APPROVED: M. EWBANK	SITE DEMOLITION AND TREE PROTECTION PLAN	SHEET NO: 5 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

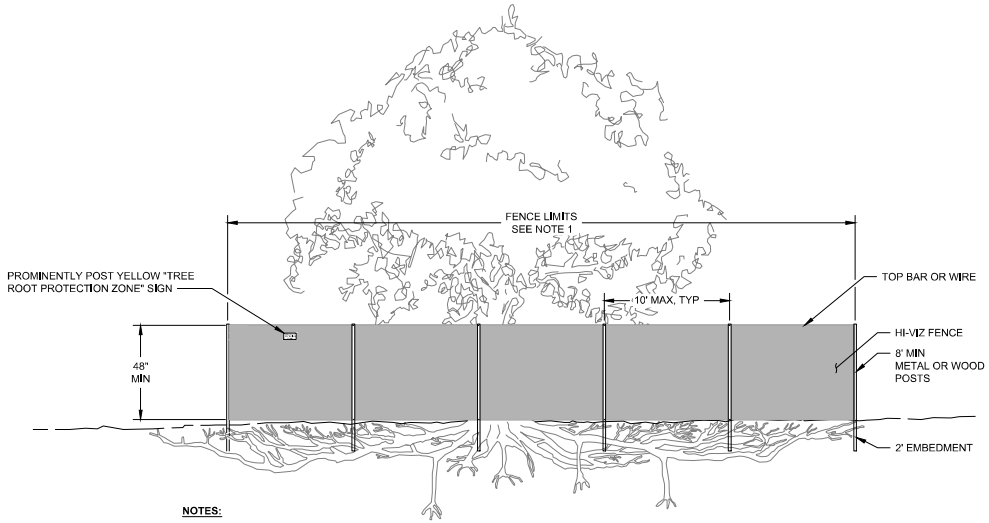

NOTES:

1. PLACE FENCING OUTSIDE OF THE ROOT PROTECTION ZONE (RPZ). RPZ IS DEFINED AS AREA EQUAL TO A 1-FOOT RADIUS FROM THE BASE OF THE TREE'S TRUNK FOR EACH 1-INCH OF THE TREE'S DIAMETER AT 4.5 FEET ABOVE GRADE (DIAMETER AT BREAST HEIGHT: DBH).

DETAIL - HI-VIS TREE PROTECTION FENCING (1 / -)

SCALE: NTS

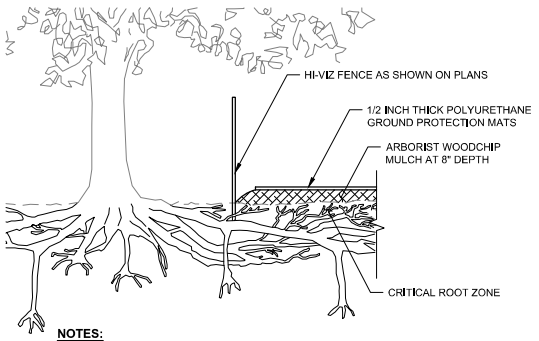

NOTES:

1. THE CONTRACTOR SHALL CONTACT THE RESIDENT ENGINEER TO OBSERVE AND DOCUMENT THE ROOT ZONE PROTECTION AND TREE PROTECTION FENCING WHEN THE INSTALLATION IS COMPLETE. THE RESIDENT ENGINEER SHALL BE NOTIFIED AT LEAST 5 WORKING DAYS PRIOR TO THE COMPLETION OF THE INSTALLATION. CRITICAL ROOT ZONE PROTECTION INSTALLATION IS REQUIRED BEFORE ADJACENT EARTHWORK ACTIVITIES MAY BEGIN.
2. AT THE COMPLETION OF CONSTRUCTION, THE CONTRACTOR SHALL REMOVE THE THE GROUND PROTECTION MATS AND RAKE AND DISTRIBUTE THE ARBORIST WOODCHIP AROUND EXISTING VEGETATION AND COVER ANY EXPOSED AREAS SOIL.

DETAIL - TEMPORARY ROOT ZONE PROTECTION (2 / -)

SCALE: NTS

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH — IF NOT ONE INCH SCALE ACCORDINGLY — AT FULL SIZE, IF NOT ONE

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

TREE PROTECTION DETAILS

DATE: AUGUST 2026

PROJECT NO: 24-08417-000

DRAWING NO: C2.02

SHEET NO: 6 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet Details - Tree protection.dwg | 8/2/2026 8:37 AM | Eric Marshall

NOTES:

1. ALL DISTURBED AREAS FROM STAGING, TEMPORARY ACCESS ROUTES AND TEMPORARY CROSSINGS SHALL BE STABILIZED AT THE END OF EACH PHASE OF CONSTRUCTION, SEE SHEET L1.01. FINAL RESTORATION, DECOMPACTION AND PLANTINGS OF STAGING AREAS AND ACCESS ROADS SHALL OCCUR DURING THE FINAL PHASE OF PROJECT CONSTRUCTION OR ONCE NO LONGER NEEDED FOR FUTURE PHASES OF CONSTRUCTION.
2. CONTRACTOR SHALL INSTALL A TEMPORARY CONSTRUCTION ACCESS BRIDGE OVER SKOOKUM CREEK THAT SPANS OVER THE EXISTING PRIVATE DRIVEWAY BRIDGE. THE CONTRACTOR SHALL NOT UTILIZE EXISTING PRIVATE DRIVEWAY BRIDGE FOR CONSTRUCTION ACCESS OR SUPPORT FOR THE TEMPORARY CONSTRUCTION ACCESS BRIDGE AND PROTECT THE EXISTING BRIDGE IN PLACE. THE TEMPORARY CONSTRUCTION ACCESS BRIDGE SHALL BE REMOVED AT THE END OF EACH PHASE OF PROJECT CONSTRUCTION.
3. THE CONTRACTOR SHALL MAINTAIN ACCESS FOR PROPERTY OWNERS AT ALL TIMES.
4. THE WIDTH OF THE TEMPORARY PERIMETER ACCESS ROUTE IS 20 FEET. THE LENGTH OF THE TEMPORARY PERIMETER ACCESS ROUTE REQUIRED FOR EACH PHASE OF PROJECT CONSTRUCTION WILL DEPEND ON THE CONTRACTORS MEANS AND METHODS AND CONSTRUCTION SEQUENCING. PORTIONS OF THE ACCESS ROUTE MAY CONTAIN WET AND OR SATURATED SOILS DURING CONSTRUCTION.
5. ALL TEMPORARY FLOODPLAIN CROSSINGS ALONG THE PERIMETER ACCESS ROUTE SHALL BE REMOVED AT THE END OF EACH PHASE OF CONSTRUCTION. THE NEED FOR THESE CROSSINGS WILL DEPEND ON THE PHASE OF CONSTRUCTION AND ON THE CONTRACTORS CONSTRUCTION SEQUENCING. ADDITIONAL TEMPORARY CROSSINGS MAY BE REQUIRED FOR UNIDENTIFIED DITCHES NOT SHOWN ON THE PLANS. TEMPORARY FLOODPLAIN CROSSING SPAN LENGTHS WILL VARY BETWEEN 10' AND 20'.
6. ALL TEMPORARY CREEK CROSSINGS OVER THE PROPOSED CHANNEL REALIGNMENT SHALL BE REMOVED AT THE END OF EACH SUMMER CONSTRUCTION PERIOD. THE NEED FOR THESE CROSSINGS WILL DEPEND ON THE PHASE OF CONSTRUCTION AND ON THE CONTRACTORS CONSTRUCTION SEQUENCING. TEMPORARY CREEK CROSSING SPAN LENGTHS WILL VARY BETWEEN 50' AND 70'.
7. TEMPORARY POND AND FLOODPLAIN ACCESS ROUTES ARE ALIGNED WITH PROPOSED HUMMOCKS AND FLOODPLAIN HABITAT STRUCTURES TO MINIMIZE CONSTRUCTION FOOTPRINT AND TO COMBINE FINAL GRADING WORK WITH TEMPORARY ACCESS NEEDS IN AREAS ANTICIPATED TO BE WET DURING CONSTRUCTION. ANY TEMPORARY FILL MATERIAL USED FOR ACCESS TO CONSTRUCT PROPOSED HUMMOCKS OUTSIDE OF THE FINAL CONSTRUCTION FOOTPRINTS SHALL BE REMOVED AT THE END OF EACH PERIOD OF SUMMER CONSTRUCTION.
8. TEMPORARY CROSSINGS MAY BE REQUIRED TO BE INSTALLED AT SHOWN CROSSING LOCATIONS BY OTHERS BETWEEN PHASES OF PROJECT CONSTRUCTION FOR RESTORATION PLANTING ACCESS AND PLANTING MAINTENANCE ACTIVITIES.
9. THE IDENTIFIED POTENTIAL OVER-WINTER STOCKPILE AREA IS OUTSIDE OF THE 100-YEAR FLOOD INUNDATION LIMITS AND SHALL BE USED TO STOCKPILE EXCAVATED FLOODPLAIN LACUSTRINE FILL MATERIAL FOR FUTURE PHASES OF CONSTRUCTION.
10. DISTURBANCE LIMITS REPRESENT POTENTIALLY DISTURBED AREAS FROM CONSTRUCTION ACCESS REQUIRED FOR THE EXCAVATION OF FLOODPLAIN HABITAT STRUCTURES, CHANNEL EXCAVATION, AND STAGING. ADDITIONAL ANTICIPATED DISTURBANCE LIMITS BEYOND THIS LIMIT INCLUDE ACCESS ROUTES AND THE FINAL CONSTRUCTION FOOTPRINT OF THE HUMMOCKS.
11. POND WATER SURFACE ELEVATIONS SHOWN ARE APPROXIMATE AND FOR VISUAL REFERENCE ONLY. INUNDATION LIMITS ARE BASED ON THE APPROXIMATE BATHYMETRIC DATA COLLECTED BY SPSSEG. PONDING LIMITS MAY VARY BASED ON ACTUAL POND BATYHMETRIC TOPOGRAPHY.

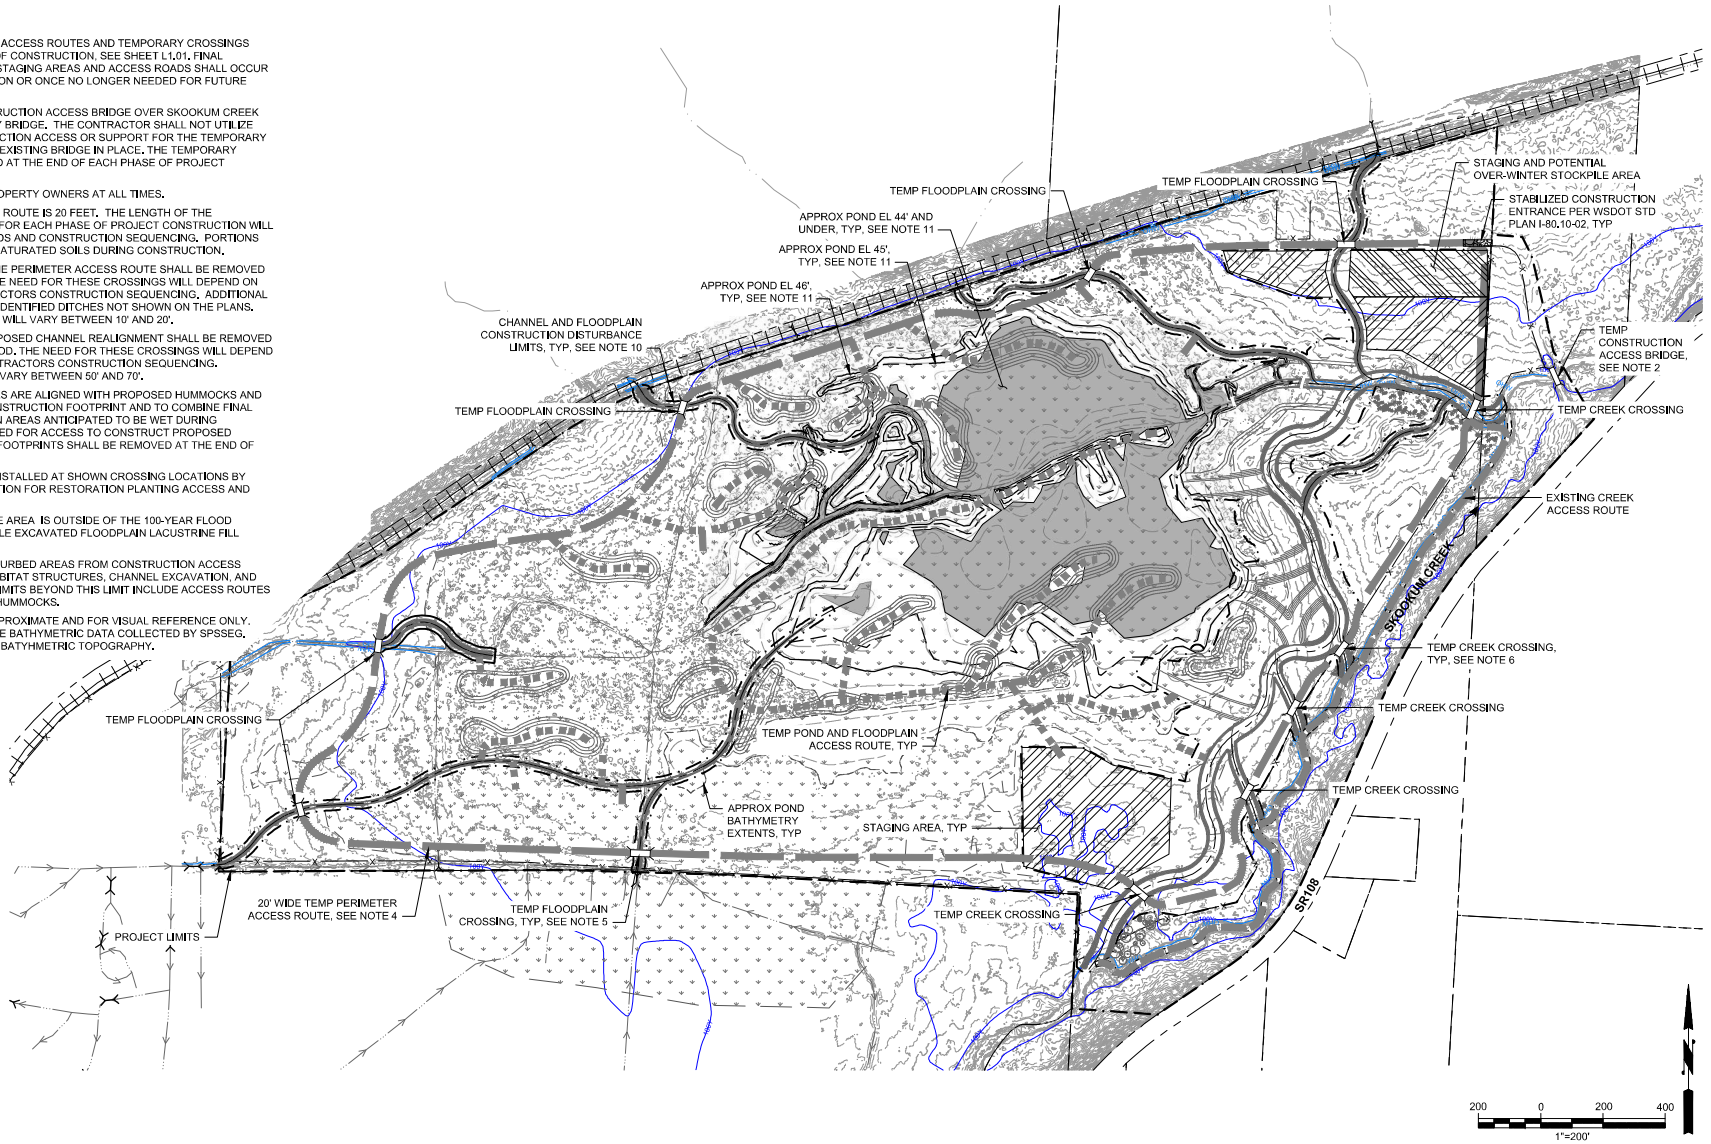

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH SCALE ACCORDINGLY
AT FULL SIZE

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

ACCESS AND STAGING PLAN

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C2.10
SHEET NO: 7 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet\Access_Staging_WaterMgmt.dwg | 9/5/2025 9:38 AM | Eric Marshall

NOTES

1. PLAN SHOWS MINIMUM WATER MANAGEMENT REQUIREMENTS. WATER MANAGEMENT REQUIREMENTS WILL DEPEND ON SITE CONDITIONS AT THE TIME OF CONSTRUCTION AND THE CONTRACTORS SCHEDULE, WORK SEQUENCING, AND MEANS AND METHODS. CONTRACTOR TO SUBMIT TEMPORARY WATER ISOLATION PLAN (TWIP) AS DETAILED IN THE SPECIAL PROVISIONS.
2. THE TEMPORARY WATER ISOLATION PLAN REQUIRES A TWO STAGE SEQUENCE. DURING STAGE 1, THE CONTRACTOR SHALL DRAW DOWN THE EXISTING POND TO LOWER WATER SURFACE ELEVATIONS BY NOTCHING THE EXISTING BEAVER DAM. SEE DWG C2.12 FOR DETAILS. DURING STAGE 2, THE CONTRACTOR WILL IMPLEMENT SMALLER TEMPORARY WATER ISOLATION MEASURES AS NEEDED FOR IN WATER WORK AS OUTLINED IN THE PLANS AND SPECIAL PROVISIONS AND TO MAINTAIN WATER QUALITY STANDARDS AS REQUIRED BY THE PROJECT PERMITS.
3. PLANS DO NOT SHOW ALL STAGE 2 WORK AREA ISOLATION MEASURES. TEMPORARY WATER ISOLATION MEASURES WILL VARY BASED ON CONTRACTORS MEANS AND METHODS AND CONSTRUCTION SEQUENCING.
4. POND WATER SURFACE ELEVATIONS SHOWN ARE APPROXIMATE AND FOR VISUAL REFERENCE ONLY. INUNDATION LIMITS ARE BASED ON THE APPROXIMATE BATHYMETRIC DATA COLLECTED BY SPSSEG. PONDING LIMITS MAY VARY BASED ON ACTUAL POND BATYHMETRIC TOPOGRAPHY.
5. THE CONTRACTOR IS NOT PERMITTED TO PERFORM IN WATER EXCAVATION AND GRADING WORK WITHOUT FIRST ESTABLISHING WATER ISOLATION MEASURES AND BEFORE FISH EXCLUSION ACTIVITIES HAVE BEEN COMPLETED. WHEN REQUIRED, CONTRACTOR SHALL INSTALL AND MAINTAIN WATER ISOLATION MEASURES AROUND THE REQUIRED WORK AREAS TO MAINTAIN WATER QUALITY. SEE DWGS C2.20 AND C2.21 FOR DETAILS.
6. THE CONTRACTOR MAY NEED TO PUMP SEDIMENT LADEN WATER FROM OPEN EXCAVATIONS DUE TO GROUNDWATER SEEPAGE DURING CONSTRUCTION. ALL PUMPING OF WATER SHALL COMPLY WITH THE PROJECT PERMITS.
7. CONTRACTOR TO INSTALL AND MAINTAIN TEMPORARY WATER ISOLATION IN A MANNER THAT MINIMIZES DISTURBANCE TO SHALLOW AREAS OF THE POND FOR HUMMOCK CONSTRUCTION.
8. CONTRACTOR TO MONITOR WEATHER FORECASTS AND TEMPORARILY PAUSE CONSTRUCTION AND SECURE ALL WORK AREAS FOR PERIODS WHEN HIGH STREAM FLOW IS EXPECTED.

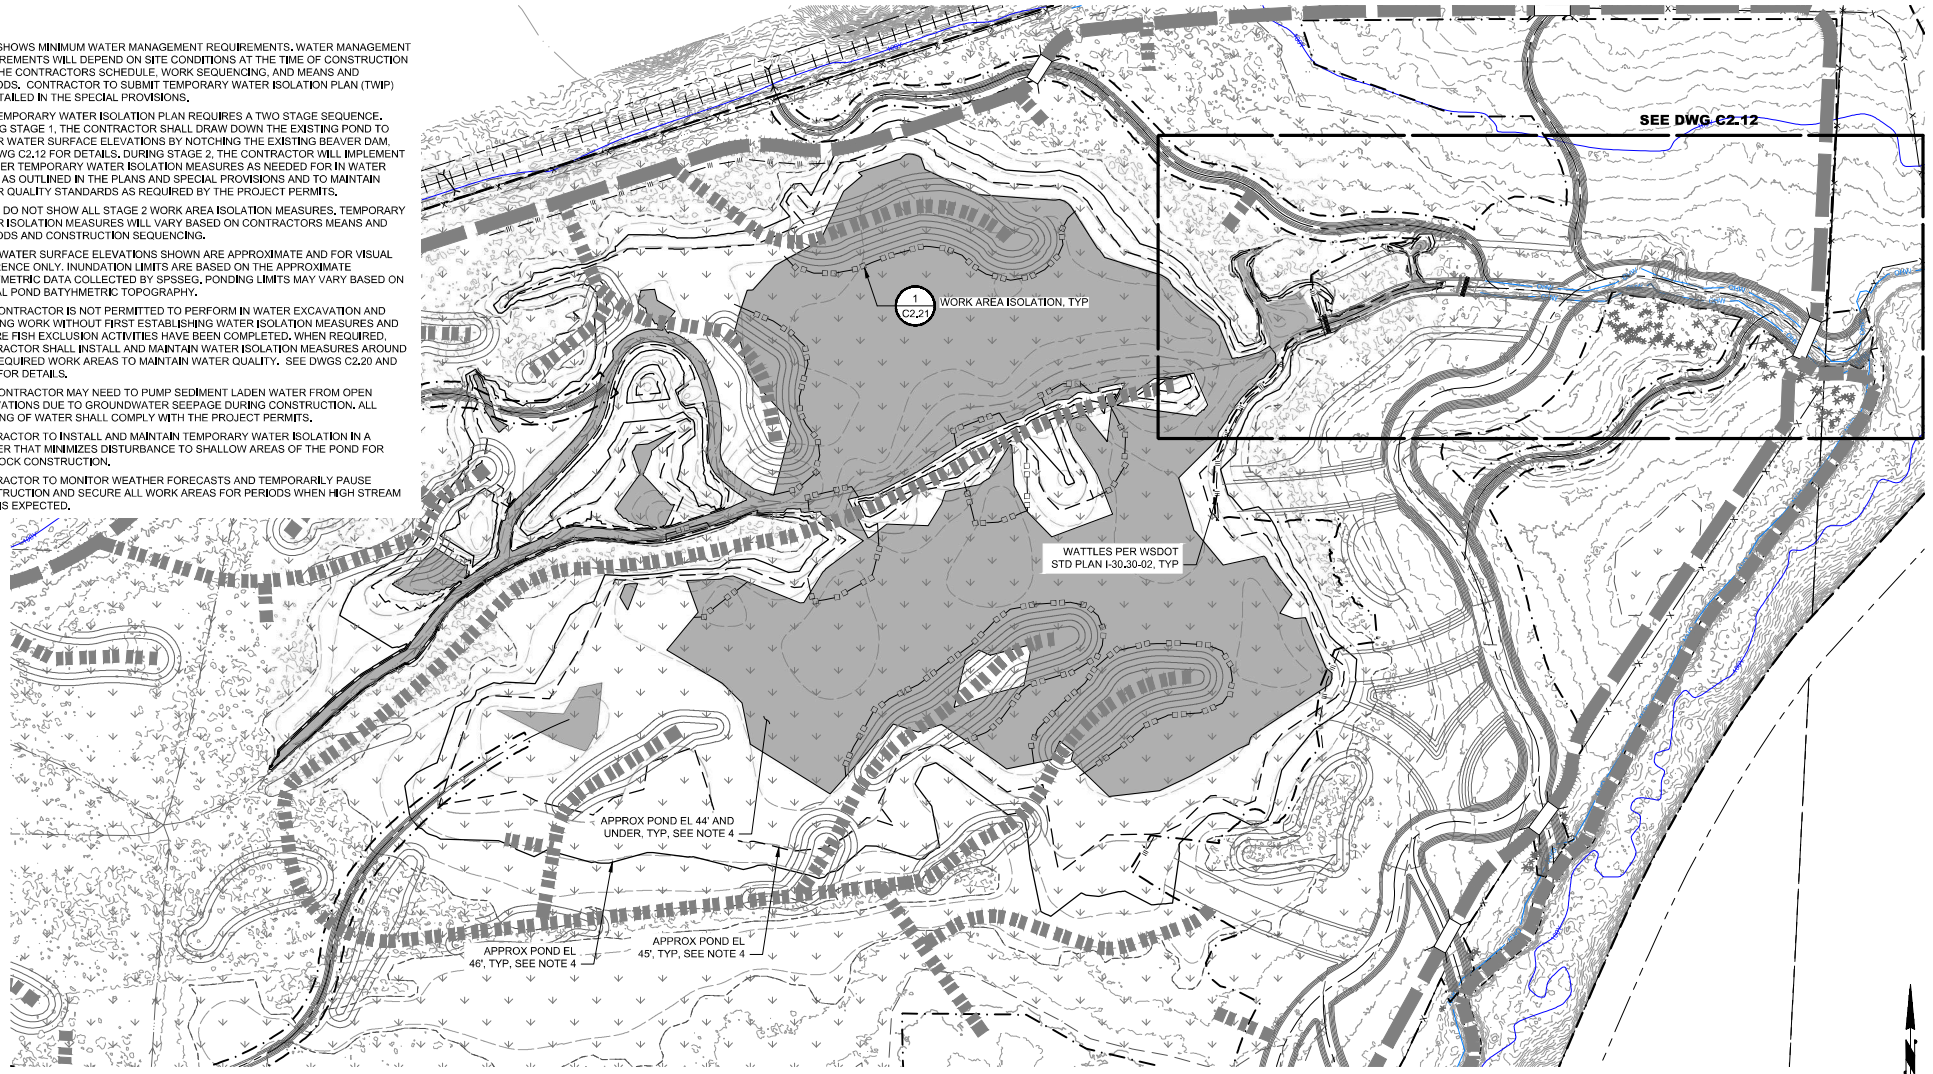

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

TESC AND WATER ISOLATION PLAN

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C2.11
SHEET NO: 8 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet\Access_Staging_WaterMgmt.dwg | 9/5/2025 9:38 AM | Eric Marshall

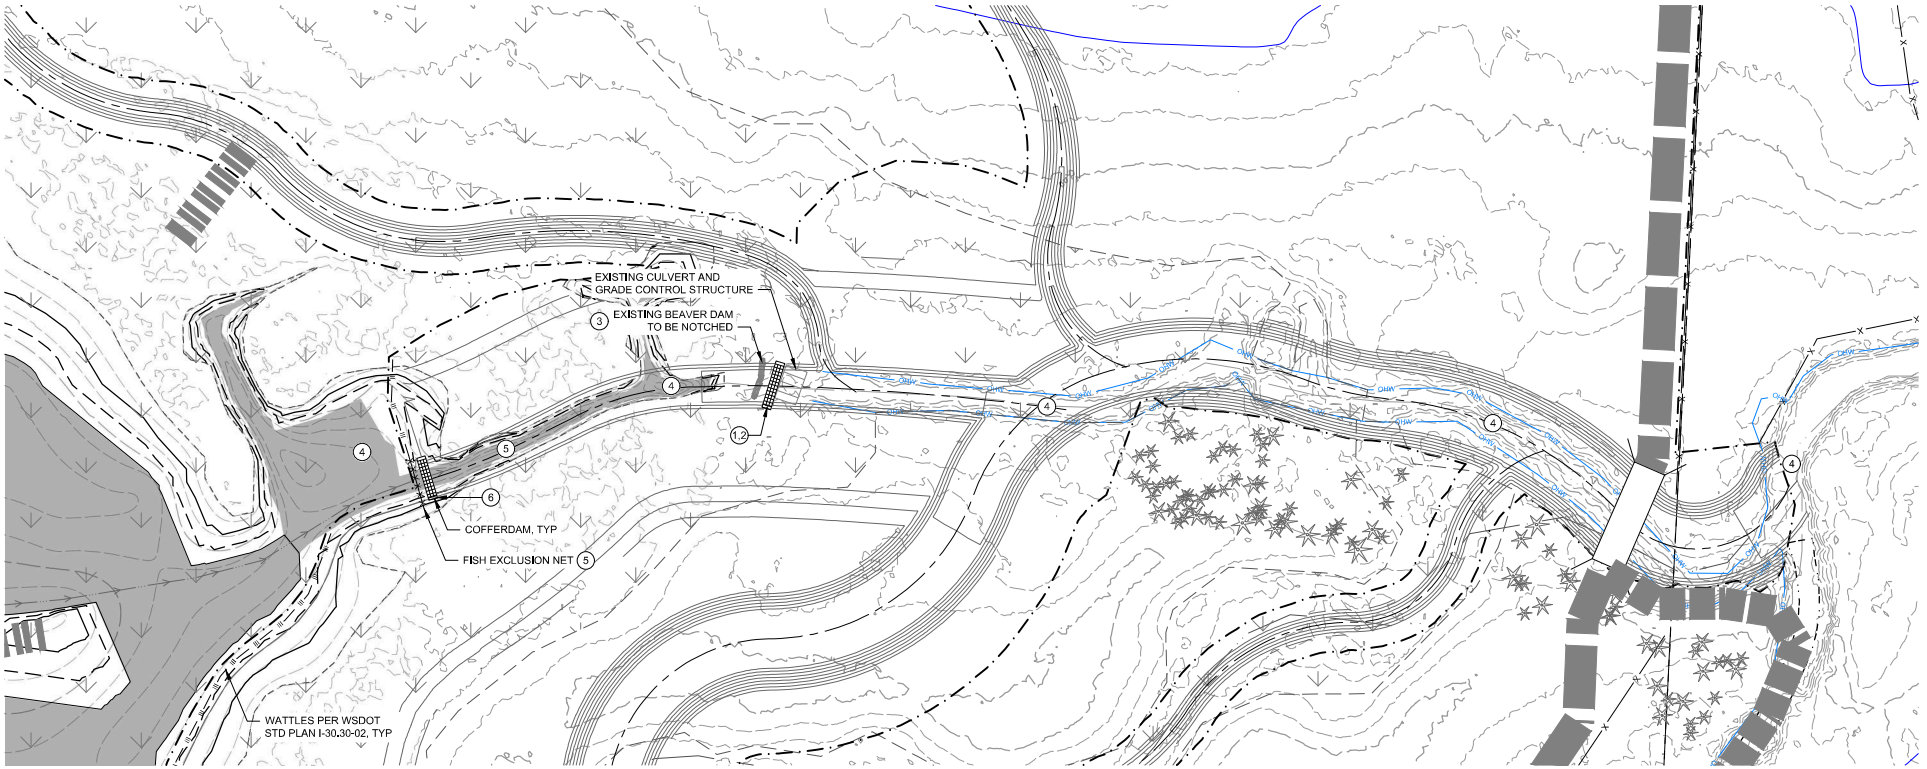

NOTES

1. SEE DWG C2.20 FOR BYPASS DETAILS.
2. DRAW DOWN OF THE POND SHALL OCCUR TO LOWER INUNDATION LIMITS AND DECREASE REQUIRED IN-WATER WORK FOR FLOODPLAIN AND HUMMOCK CONSTRUCTION ACTIVITIES PER SEQUENCING KEYNOTES.

(#) RECOMMENDED TEMPORARY WATER ISOLATION STAGE 1 SEQUENCING KEYNOTES

1. COORDINATE WITH THE DIRECTING BIOLOGIST TO INSTALL A COFFERDAM AGAINST THE UPSTREAM FACE OF THE EXISTING CONCRETE CULVERT AND GRADE CONTROL STRUCTURE DOWNSTREAM OF THE BEAVER DAM. THE COFFERDAM WILL FUNCTION AS A WATER SURFACE ELEVATION CONTROL WEIR DURING DRAW DOWN.NO FISH EXCLUSION NETTING SHALL BE INSTALLED UPSTREAM OF THE BEAVER DAM IN ORDER TO ALLOW FOR THE FREE MIGRATION OF FISH AND AQUATIC SPECIES OUT OF THE POND DURING THE GRAVITY DRAW DOWN OF THE POND.
2. SET THE CREST OF THE CONTROL COFFERDAM TO THE ELEVATION OF THE EXISTING CULVERT AND GRADE CONTROL STRUCTURES (~EL 46) TO START. THE COFFERDAM WILL REDUCE THE RISK OF UNEXPECTED EXCESSIVE DRAW DOWN AFTER THE BEAVER DAM IS NOTCHED DUE TO POTENTIAL FOR UNRAVELING OF THE BEAVER DAM. CONTRACTOR SHALL CONSTRUCT COFFERDAM IN A MANNER TO ALLOW FOR OVERTOPPING OF WATER WITHOUT SCOURING OUT FILL MATERIAL FROM THE BULK BAGS OR OTHERWISE COMPROMISING THE INTEGRITY OF THE COFFERDAM.
3. NOTCH THE BEAVER DAM SEQUENTIALLY TO FACILITATE CONTROLLED GRAVITY DRAINING OF THE POND DOWN TO ELEVATION 44. AS THE WATER SURFACES LOWERS AND OVERFLOW RATES DECREASE, LOWER COFFERDAM ALONG THE CREST TO FACILITATE FURTHER CONTROLLED LOWERING OF THE POND WATER SURFACE. AFTER DRAW DOWN IS COMPLETE THE COFFERDAM SHALL MAINTAIN A WATER SURFACE OF NO LESS THAN EL 44 WITHIN THE POND.
4. THROUGHOUT THE DRAWDOWN PERIOD, THE CONTRACTOR SHALL MONITOR WATER QUALITY WITHIN THE RECEIVING WATER OF SKOOKUM CREEK TO ENSURE WATER QUALITY STANDARDS IN THE PROJECT PERMITS ARE NOT EXCEEDED. THE OUTFLOW FROM THE POND SHALL BE MONITORED FOR TURBIDITY AS THE POND LOWERS AND POND BANK SEDIMENTS ARE EXPOSED. CONTRACTOR SHALL SLOW OR STOP DRAW DOWN AS NEEDED IF WATER QUALITY THRESHOLDS ARE EXCEEDED AND CONSULT WITH THE ENGINEER AND DIRECTING HABITAT BIOLOGIST FOR NECESSARY MODIFICATIONS TO THE TEMPORARY WATER ISOLATION PLAN (TWIP).
5. AFTER THE DRAW DOWN OF THE POND IS COMPLETE, INSTALL FISH EXCLUSION NETTING UPSTREAM OF THE WORK AREA OF SURFACE HYPORHEIC CHANNEL E2 AND COORDINATE WITH THE DIRECTING BIOLOGIST TO DE-FISH THE OUTLET DITCH.
6. INSTALL WORK AREA ISOLATION COFFERDAM UPSTREAM OF WORK AREA TO MAINTAIN WATER SURFACE ELEVATIONS IN THE POND DURING CONSTRUCTION.



60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH — AT FULL SIZE. IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

POND DEWATERING AND OUTLET PLAN

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C2.12
SHEET NO: 9 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\T2-17-1\24-08417-000\CAD\Sheet\Access_Staging_WaterMgmt.dwg | 9/5/2025 9:38 AM | Eric Marshall

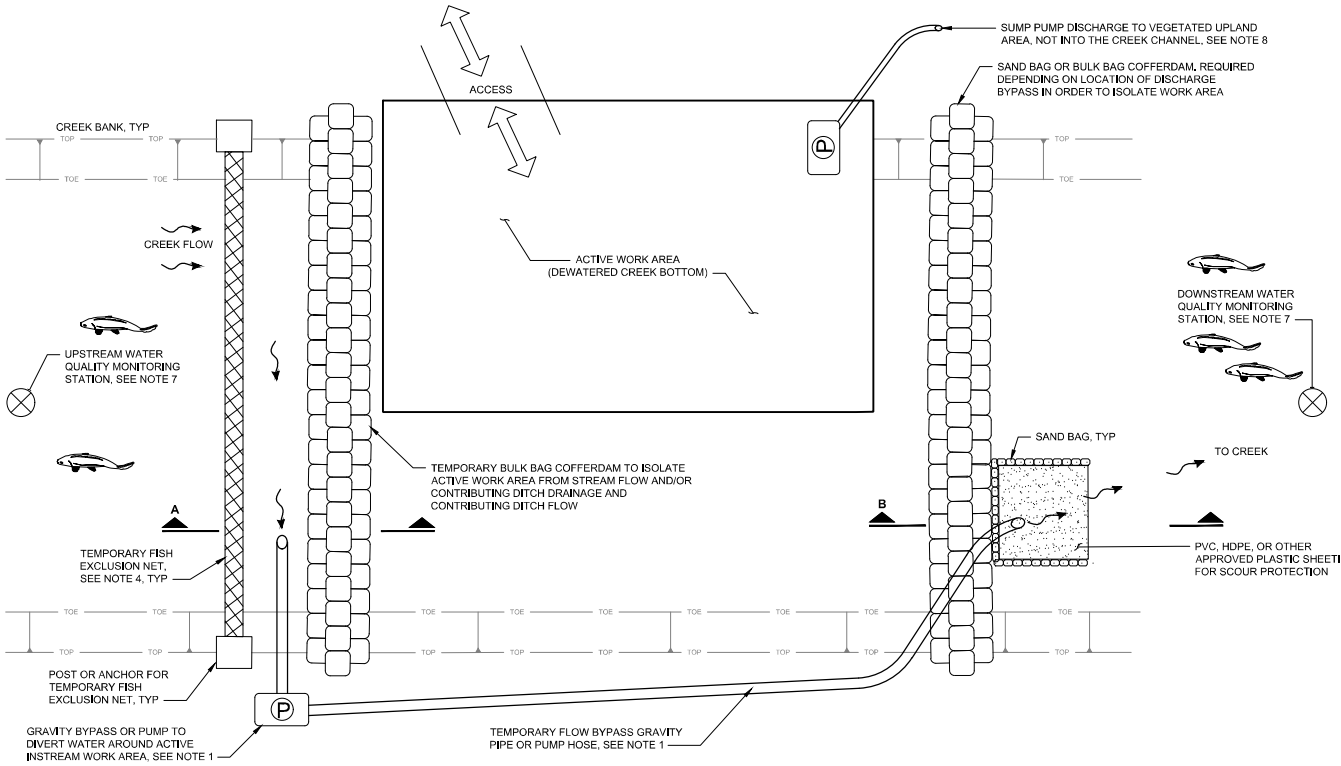

PLAN

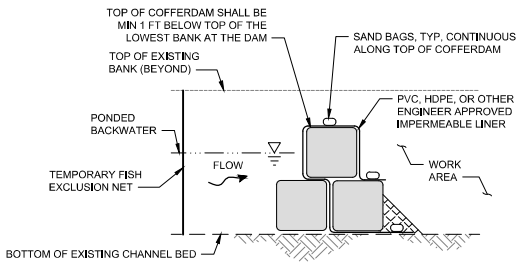

SECTION A

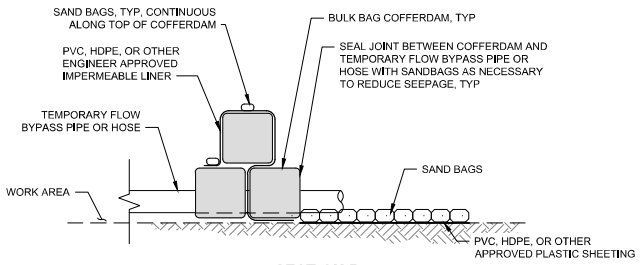

SECTION B

DETAIL - TEMPORARY FLOW BYPASS AND FISH EXCLUSION PLAN

SCALE: NTS

1

NOTES:

1. THIS FLOW BYPASS AND FISH EXCLUSION SCHEMATIC REPRESENTS THE MINIMUM FLOW BYPASS REQUIREMENTS. ALTERNATIVE PROPOSALS FOR FLOW BYPASS MAY BE SUBMITTED TO THE ENGINEER FOR APPROVAL AND ANY ADJUSTMENTS WILL BE MADE AT THE CONTRACTOR'S EXPENSE, CONDITIONS OF PROJECT PERMITS AND EASEMENTS MUST BE FOLLOWED AT ALL TIMES. SEE CONTRACT SPECIFICATIONS.
2. ALL TEMPORARY FLOW BYPASS EQUIPMENT, PIPES AND HOSES SHALL BE LOCATED AND ALIGNED WITHIN THE PERMANENT AND TEMPORARY CONSTRUCTION EASEMENTS, SEE CONTRACT SPECIFICATIONS.
3. ALL EXCAVATIONS THAT HAVE POTENTIAL TO IMPACT THE WETTED CHANNEL OR POND SHALL BE ISOLATED FROM THE ACTIVE FLOW OR REMAINING PORTIONS OF INNUNDATED POND AREA BY THE CONTRACTOR. ISOLATION MEANS SHALL CONSIST OF A TEMPORARY FLOW BARRIER TO DIVERT WATER AROUND THE ACTIVE WORK AREA. CONTRACTOR SHALL USE EVERY MEASURE POSSIBLE TO MINIMIZE TURBIDITY DISCHARGES INTO CREEK AND SHALL STOP CONSTRUCTION AS DIRECTED BY ENGINEER IF TURBIDITY EXCEEDS PERMITTED LEVELS. COFFERDAM CONSTRUCTION SHALL NOT COMMENCE UNTIL THE UPSTREAM AND DOWNSTREAM TEMPORARY FISH EXCLUSION NETS HAVE BEEN INSTALLED OR COFFERDAM AND FISH REMOVAL IS COMPLETE.
4. FISH EXCLUSION AND FISH REMOVAL WORK TO BE PERFORMED BY OTHERS AND MUST BE TIMED AND COORDINATED WITH STREAM FLOW BYPASS PER THE WSDOT FISH EXCLUSION PROTOCOLS AND STANDARDS (2023 UPDATE) AND THE REQUIREMENTS OF THE HYDRAULIC PROJECT APPROVAL PERMIT. TEMPORARY FISH EXCLUSION NET MUST REMAIN IN PLACE DURING INSTREAM WORK AND COFFERDAM REMOVAL.
5. ALTERNATIVE COFFERDAM CONSTRUCTION (BLADDER DAMS OR APPROVED EQUAL) MAY BE USED IN PLACE OF BULK BAG COFFERDAMS WITH APPROVAL FROM THE ENGINEER. SIZE, QUANTITY AND CONFIGURATION OF BULK BAGS SHOWN FOR COFFERDAMS ARE CONCEPTUAL ONLY AND WILL VARY FROM THAT SHOWN. CONTRACTOR SHALL BE RESPONSIBLE FOR DETERMINING APPROPRIATE SIZE, QUANTITY AND CONFIGURATION OF BULK BAGS AND/OR SANDBAGS NECESSARY TO BYPASS FLOW AND ISOLATE THE WORK AREA AND ENABLE SUCCESSFUL OPERATION OF BYPASS SYSTEM AND MINIMIZE FLOW LEAKAGE TO THE EXTENT NECESSARY TO COMPLETE CONSTRUCTION AND CONFORM TO PERMIT REQUIREMENTS. MINOR EXCAVATION OF BANKS WILL BE ALLOWED TO KEY-IN BULK BAGS AS NECESSARY TO MINIMIZE FLOW LEAKAGE AND COMPLETE INSTALLATION OF COFFERDAM. ALL BULK BAGS SHALL BE FILLED WITH CLEAN WASHED ROUNDED GRAVEL AND SANDBAGS FILLED WITH CLEAN, WASHED SAND.
6. TEMPORARY PUMPING OF FLOWS IN SKOOKUM CREEK DURING INSTALLATION AND REMOVAL OF UPSTREAM COFFERDAM AND DOWNSTREAM OUTLET ENERGY DISSIPATER, AND DURING ALL INSTREAM CONSTRUCTION, WILL BE REQUIRED EXCEPT DURING HIGH FLOWS. SEE CONTRACT SPECIFICATIONS REGARDING FLOW BYPASS REQUIREMENTS DURING HIGH FLOWS. BYPASS PUMPS AND PIPES TO BE PROTECTED FROM CONSTRUCTION ACTIVITIES AT ALL TIMES. SOME TEMPORARY PIPE ANCHORING MAY BE REQUIRED, SEE CONTRACT SPECIFICATIONS.
7. TEMPORARY PUMPING OF WATER FROM THE FLOODPLAIN DITCHES AND POND SHALL ONLY BE REQUIRED TO MAINTAIN SAFE WORKING CONDITIONS AND TO MAINTAIN FREEBOARD FOR THE WORK AREA ISOLATION DAMS. PUMPING MAY NOT BE REQUIRED DURING PERIODS OF LOW INFLOW DEPENDING ON THE DURATION OF REQUIRED WATER ISOLATION.
8. WATER QUALITY MONITORING STATIONS TO BE LOCATED UPSTREAM AND DOWNSTREAM OF FLOW BYPASS SYSTEM PER PROJECT PERMITS.
9. GROUNDWATER MAY BE ENCOUNTERED IN EXCAVATIONS. CONTRACTOR SHALL DEWATER AS NECESSARY FOR CONSTRUCTION AND INSPECTION. ALL DEWATERING WATER SHALL BE DISCHARGED TO INFILTRATION AREAS OR AN EROSION CONTROL BMP AS APPROVED BY THE ENGINEER. THE WATER SHALL NOT BE DIRECTLY DISCHARGED INTO CREEK OR POND. EROSION CONTROL BMPs MAY BE NECESSARY TO ENSURE THAT DEWATERING ACTIVITIES SHALL NOT IMPACT WATER QUALITY IN CREEK OR POND NOR CAUSE EROSION WHEN DISCHARGED TO UPLAND AREAS.
10. THE FLOW BYPASS AND FISH EXCLUSION SYSTEM SHALL BE MAINTAINED 24 HOURS PER DAY DURING CONSTRUCTION AND MONITORED BY THE CONTRACTOR DURING WORKING AND NON-WORKING HOURS.
11. CONTRACTOR SHALL REMOVE ALL TEMPORARY FLOW BYPASS MATERIALS FOLLOWING CONSTRUCTION AND FULLY RESTORE DISTURBED AREAS TO PRE-CONSTRUCTION CONDITIONS.

SHORING NOTES:

1. CONTRACTOR SHALL DESIGN ALL REQUIRED SHORING AND ALL FLOW AND WATER EXCLUSION STRUCTURES AND SYSTEMS. HYDROSTATIC PRESSURES SHALL BE ADDED TO LATERAL PRESSURES DUE TO EARTH, SURCHARGES AND SPECIAL PRESSURES. SPECIAL PRESSURES MAY INCLUDE BUT ARE NOT LIMITED TO HYDROSTATIC PRESSURES RESULTING FROM BACKWATER CONDITIONS, TEMPORARY SHORING SEEPAGE, MACHINERY SURCHARGE AND FLUCTUATING GROUNDWATER.
2. OTHER SURCHARGES SHALL BE DETERMINED BY THE CONTRACTOR ON THE BASIS OF CONSTRUCTION TRAFFIC, EQUIPMENT STORAGE, SPOILS HANDLING, WORK SEQUENCE AND OTHER FACTORS.
3. ALL TEMPORARY SHORING SYSTEMS SHALL BE DESIGNED BY A LICENSED PROFESSIONAL ENGINEER WITH A MINIMUM FACTOR OF SAFETY OF 1.4 (FS = 1.4).

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH — AT FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

WATER MANAGEMENT DETAILS 1

DATE: AUGUST 2026

PROJECT NO: 24-08417-000

DRAWING NO: C2.20

SHEET NO: 10 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-T-\24\08417-000\CAD\Sheet Details - Wastewtr\grnd1.dwg | 9/2/2026 9:38 AM | Eric Marshall

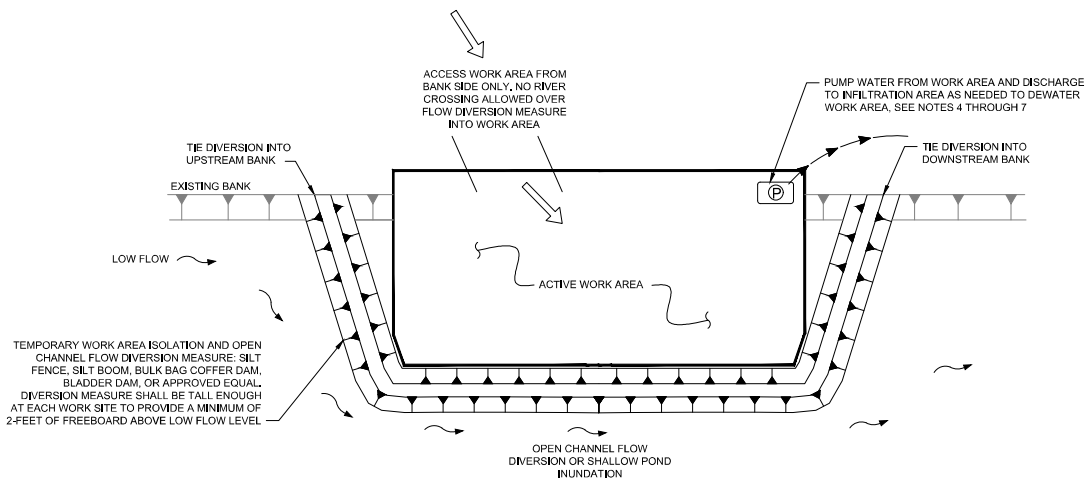

DETAIL - WORK AREA ISOLATION SCHEMATIC (1)
SCALE: NTS

WATER MANAGEMENT NOTES:

1. WATER MANAGEMENT METHODS SHALL BE USED TO DIVERT FLOW AND ISOLATE WORK AREAS AS NECESSARY TO COMPLETE CONSTRUCTION AND TO AVOID IMPACTS TO WATER QUALITY. DIVERSION AND ISOLATION MEANS MAY INCLUDE SILT FENCE, SILT BOOMS, BULK BAGS, BLADDER DAMS, OR APPROVED EQUAL. COMBINATION OF DIVERSION AND ISOLATION MEASURES MAY BE USED AS NECESSARY.
2. CONTRACTOR SHALL MONITOR THE EFFECTIVENESS OF THE WORK AREA ISOLATION DAMS TO PREVENT TURBID WATERS FROM ENTERING THE NON-ISOLATED SHALLOW DEPTH AREAS OF THE POND DURING CONSTRUCTION OF THE HUMMOCKS. THE CONTRACTOR SHALL MAKE ALL NECESSARY MODIFICATIONS TO THE WORK AREA ISOLATION TO MAINTAIN THE WATER QUALITY OF THE NON-ISOLATED AREAS OF THE POND PER THE PROJECT PERMITS.
3. CONSTRUCTION WITHIN THE ISOLATED WORK AREA MAY NOT COMMENCE UNTIL THE OWNER HAS COMPLETED ALL FISH EXCLUSION ACTIVITIES. ALL TEMPORARY FISH EXCLUSION NETS INSTALLED BY THE OWNER MUST REMAIN IN PLACE DURING REMOVAL OF FLOW DIVERSION AND OTHER TESC MEASURES. THE OWNER SHALL BE RESPONSIBLE FOR REMOVING FISH EXCLUSION NETS.
4. THE CONTRACTOR SHALL BE PERMITTED TO WORK IN THE WET WITHIN ISOLATED WORK AREA PROVIDED THE ISOLATION METHODS ARE ADEQUATE TO PREVENT TURBID WATERS FROM ESCAPING DURING CONSTRUCTION ACTIVITIES.
5. DEWATERING OF ISOLATION AREAS WITHIN THE SHALLOW DEPTH AREAS OF THE POND SHALL NOT BE PERMITTED TO PREVENT LOWERING OF POND WATER SURFACE ELEVATIONS IN AREAS THAT HAVE NOT BEEN DE-FISHED.
6. THE ENGINEER SHALL BE NOTIFIED 24 HOURS IN ADVANCE OF ANY WATER PUMPING ACTIVITIES.
7. CONSTRUCTION DEWATERING SHALL BE MAINTAINED 24 HOURS PER DAY DURING CONSTRUCTION AND MONITORED BY THE CONTRACTOR DURING NON-WORKING HOURS.

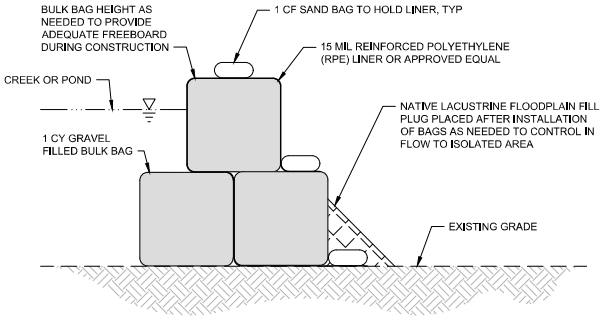

DETAIL - TYPICAL BULK BAG ISOLATION (5)
SCALE: NTS

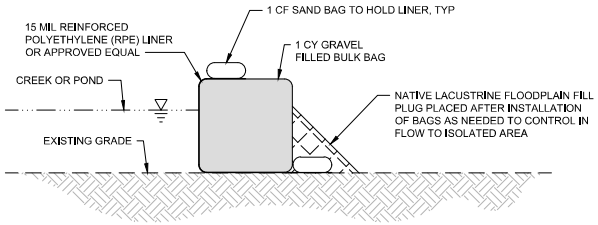

DETAIL - TYPICAL SINGLE BULK BAG ISOLATION (6)
SCALE: NTS

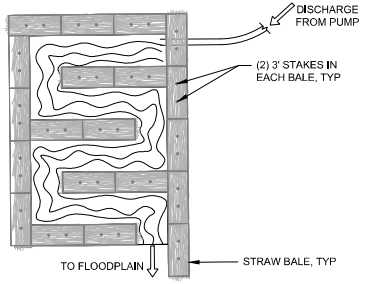

DETAIL - ENERGY DISSIPATER (2)
SCALE: NTS

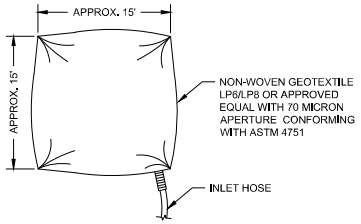

DETAIL - SILT BAG (3)
SCALE: NTS

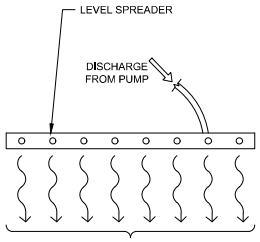

DETAIL - LEVEL SPREADER (4)
SCALE: NTS

BULK BAG NOTES:

1. PLACE/REMOVE NATIVE LACUSTRINE FLOODPLAIN FILL AS LAST/FIRST STEP OF BULK BAG ISOLATION SYSTEM INSTALLATION/REMOVAL.
2. ONLY INSTALL SINGLE BULK BAG ISOLATION WHERE WATER SURFACE EXPECTED TO BE LESS THAN 2 FT.
3. TRANSITION LINER FROM EXTERIOR (UPSTREAM END) OF ISOLATION TO INTERIOR OF ISOLATION APPROXIMATELY 1/2 THE LENGTH OF THE ISLOLATION WHERE RIVER WATER INFILTRATION INTO THE WORK AREA TRANSITIONS TO EXFILTRATION.
4. TRANSITION ISOLATION HEIGHT INTO BANKS USING SAND BAGS.

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH — AT FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION
SKOOKUM RANCH PROJECT

WATER MANAGEMENT DETAILS 2

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C2.21
SHEET NO: 11 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-1\T-1\T2-1-T-1\24-08417-000\CAD\Sheet\details - WaterMgmt.dwg | 9/2/2026 9:38 AM | Eric Marshall

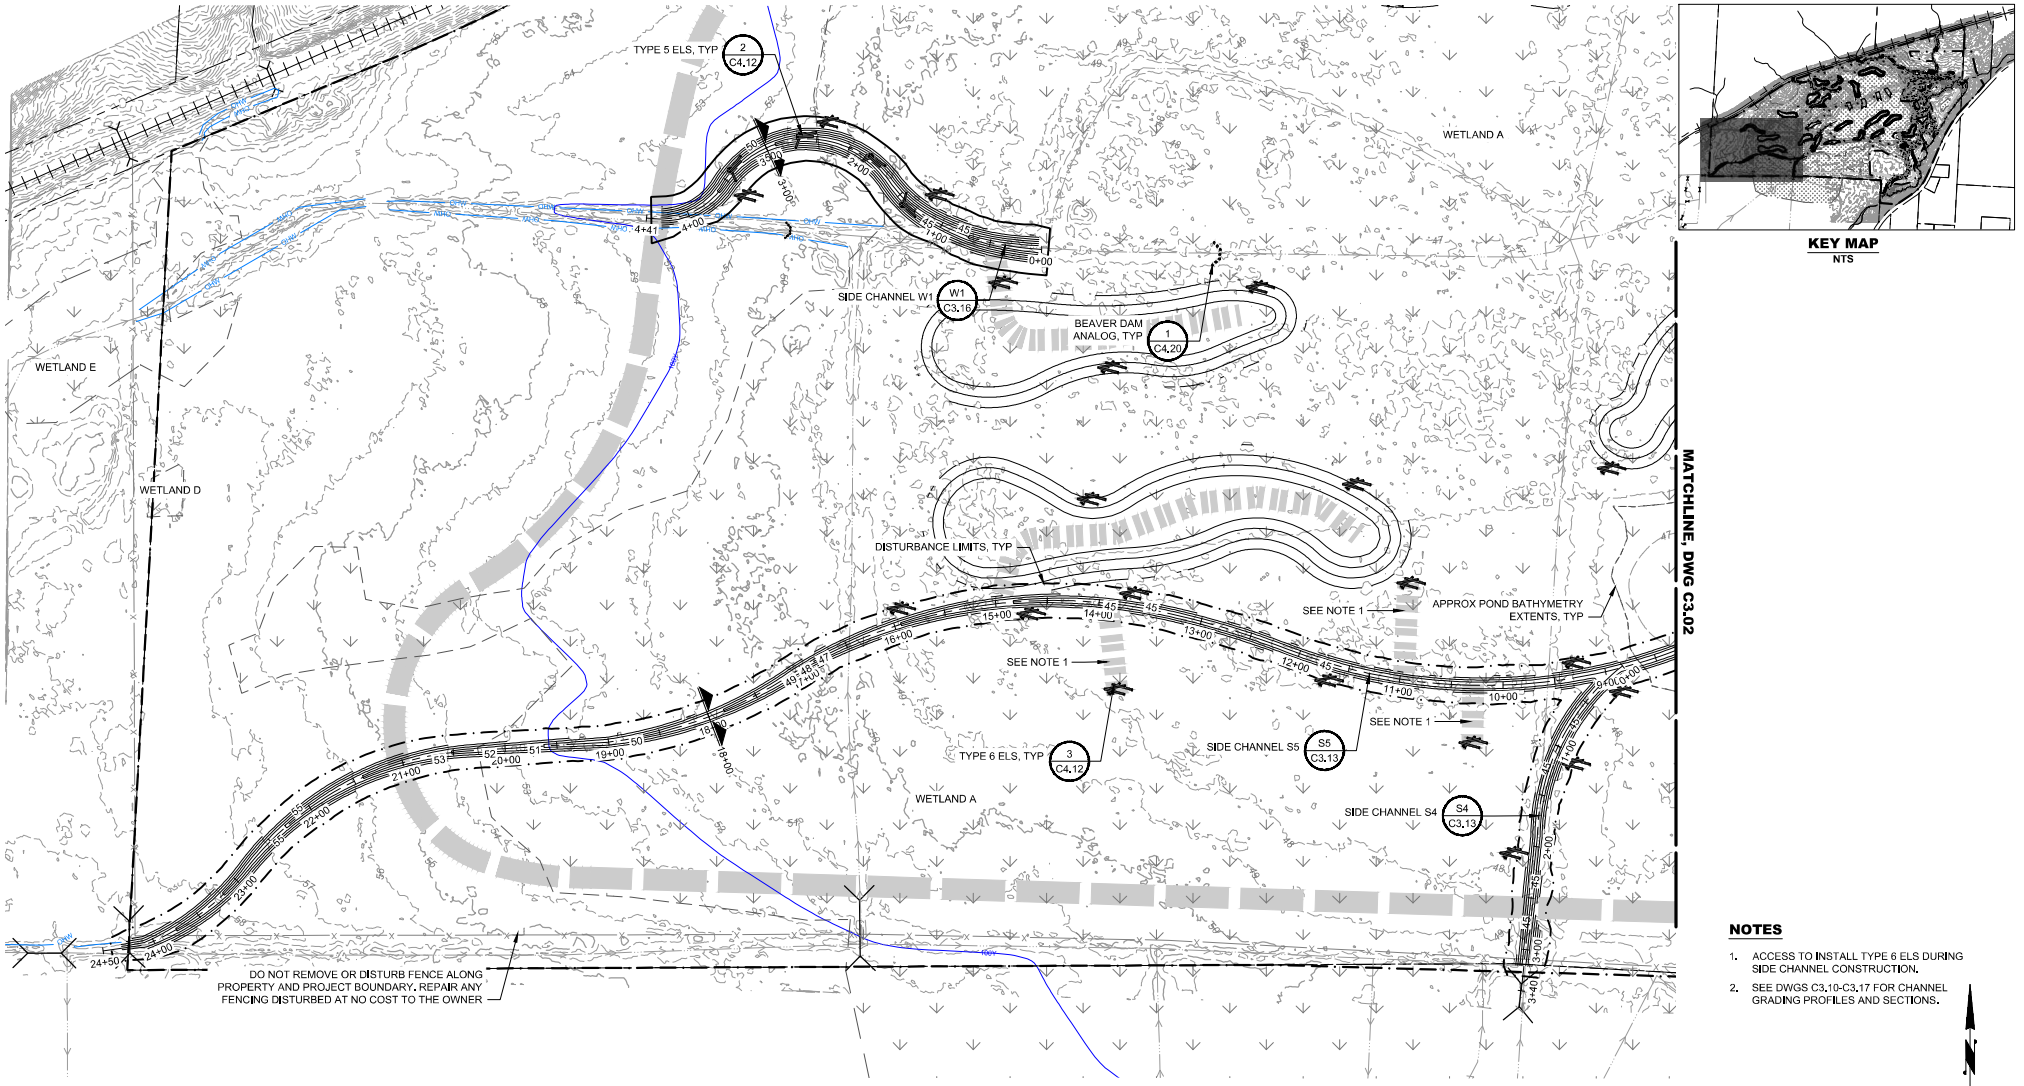

NOTES

1. ACCESS TO INSTALL TYPE 6 ELS DURING SIDE CHANNEL CONSTRUCTION.
2. SEE DWGS C3,10-C3,17 FOR CHANNEL GRADING PROFILES AND SECTIONS.

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

SITE MAP 1

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.01
SHEET NO: 12 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

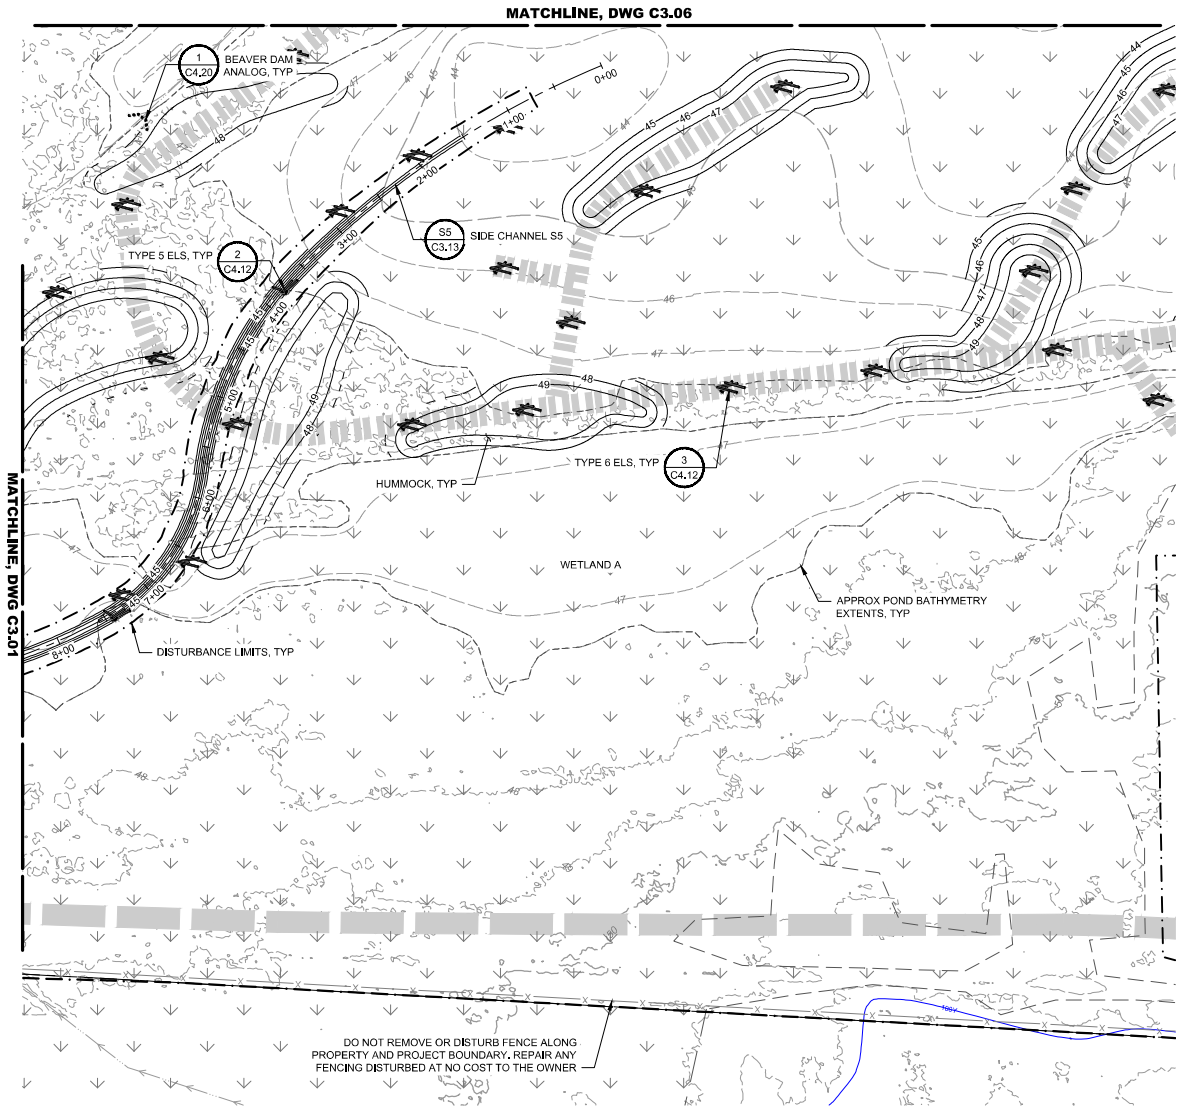

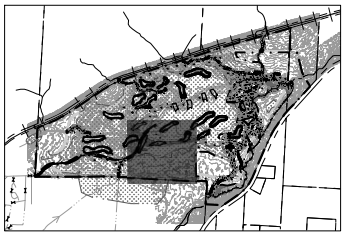

KEY MAP
NTS

NOTES

1. SEE DWGS C3.10-C3.17 FOR CHANNEL GRADING PROFILES AND SECTIONS.

60 0 60 120
1"=60'

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION
SKOOKUM RANCH PROJECT

SITE MAP 2

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.02
SHEET NO: 13 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\24-08417-000\CAD\Sheet\Site.dwg | 9/2/2026 9:30 AM | Erin Rinehart

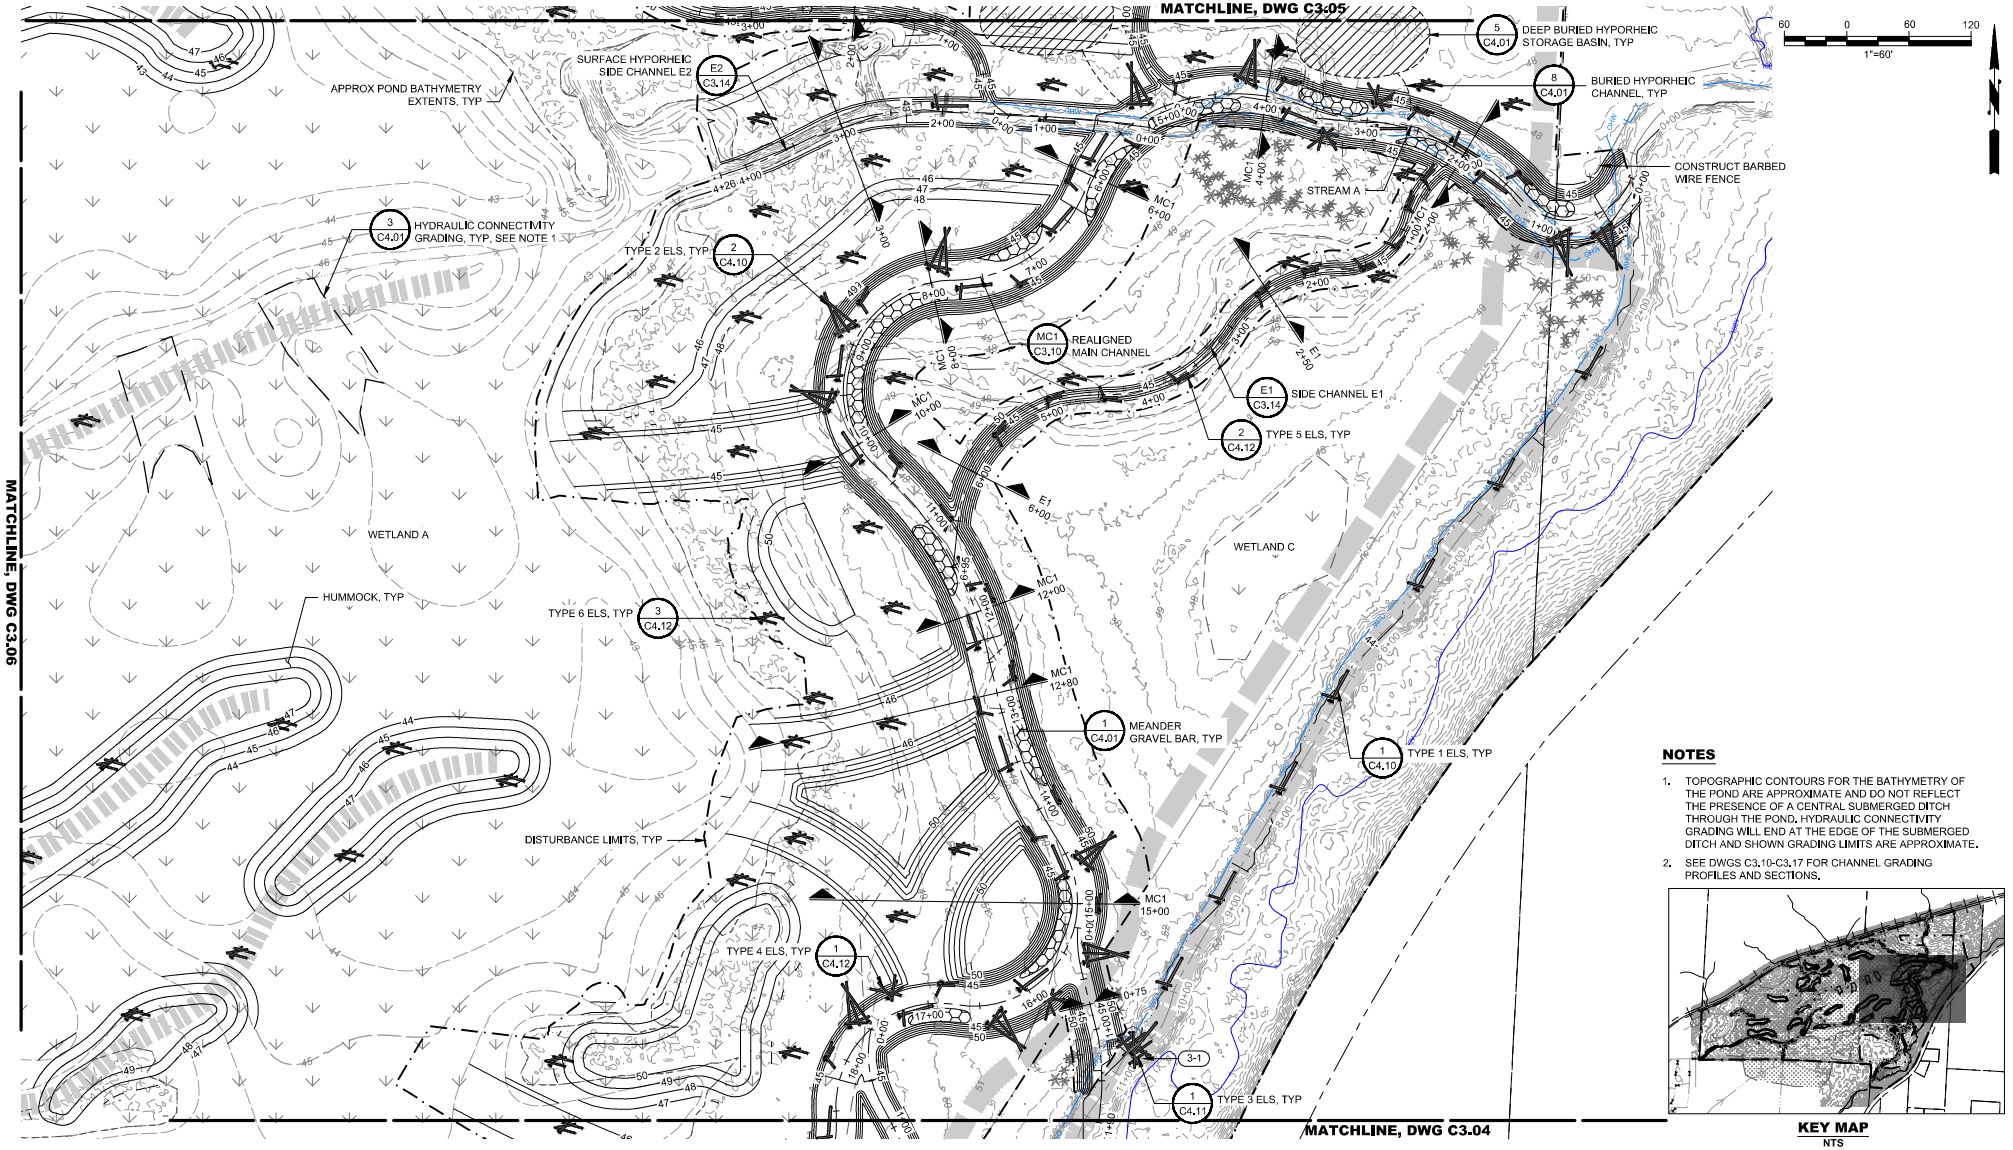

NOTES

1. TOPOGRAPHIC CONTOURS FOR THE BATHYMETRY OF THE POND ARE APPROXIMATE AND DO NOT REFLECT THE PRESENCE OF A CENTRAL SUBMERGED DITCH THROUGH THE POND. HYDRAULIC CONNECTIVITY GRADING WILL END AT THE EDGE OF THE SUBMERGED DITCH AND SHOWN GRADING LIMITS ARE APPROXIMATE.
2. SEE DWGS C3.10-C3.17 FOR CHANNEL GRADING PROFILES AND SECTIONS.

KEY MAP
NTS

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH, SCALE ACCORDINGLY
AT FULL SIZE

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

SITE MAP 3

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.03
SHEET NO: 14 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1\24-08417-000\CAD\Sheet\Site.dwg | 9/2/2026 9:30 AM | Erin Rinehart

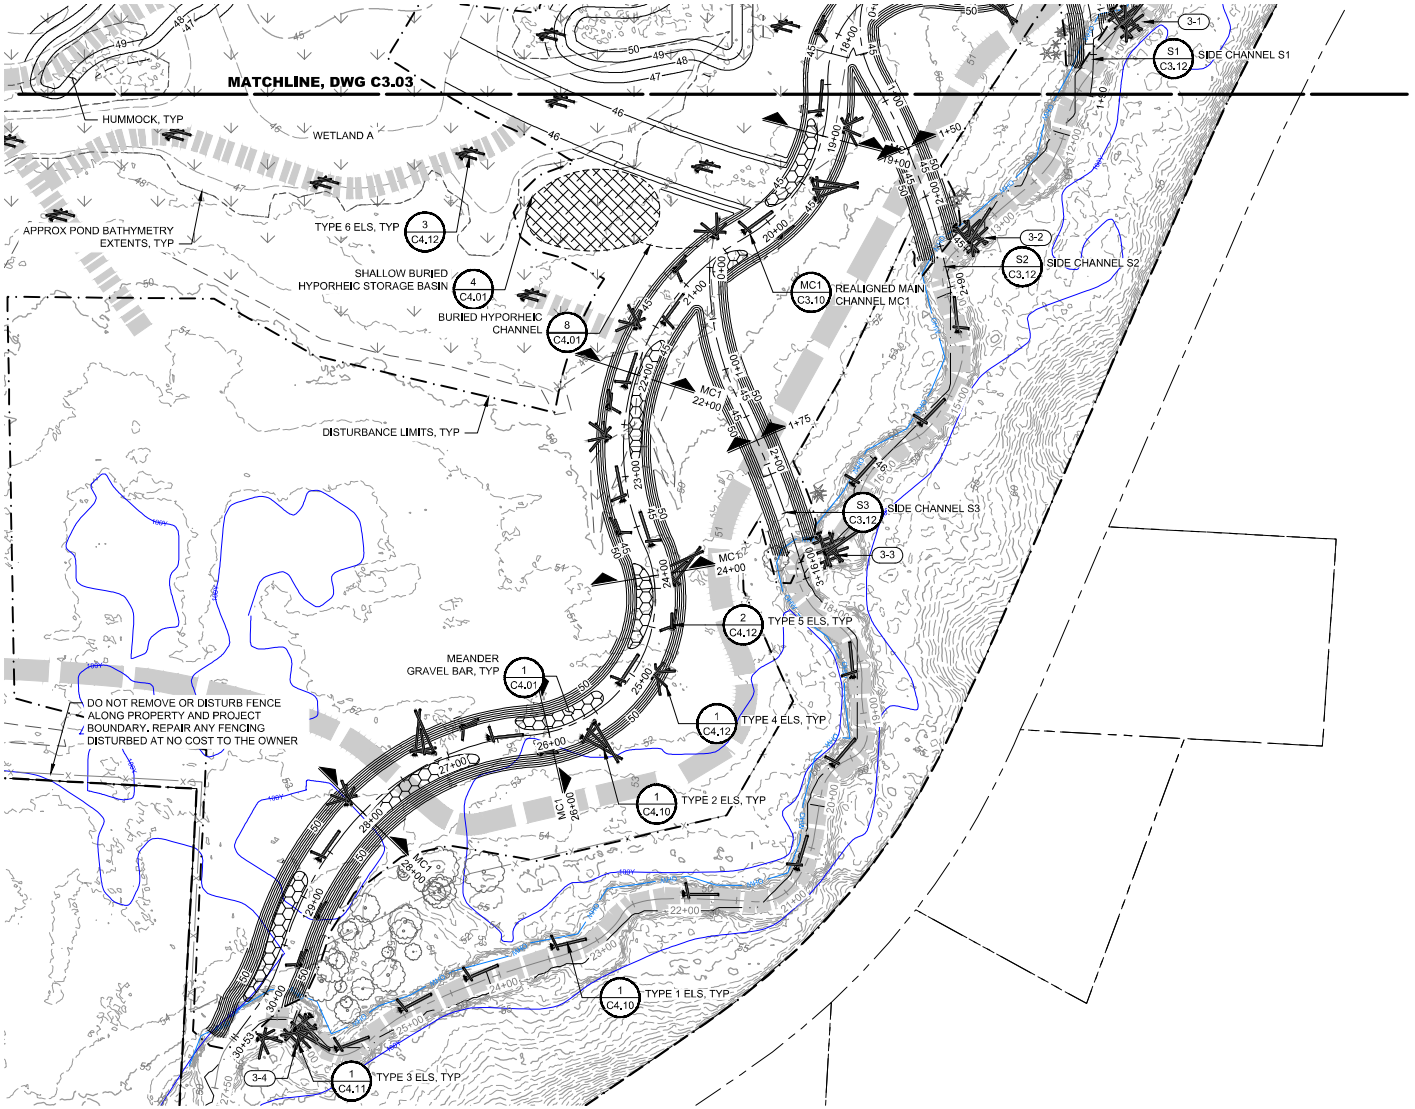

KEY MAP
NTS

NOTES

1. SEE DWGS C3,10-C3,17 FOR CHANNEL GRADING PROFILES AND SECTIONS.

60 0 60 120
1"=60'

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH SCALE ACCORDINGLY
AT FULL SIZE

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION
SKOOKUM RANCH PROJECT

SITE MAP 4

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.04
SHEET NO: 15 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-1\T-1\24\24-08417-000\CAD\Sheet\Site.dwg | 9/2/2026 9:38 AM | Eric Kimball

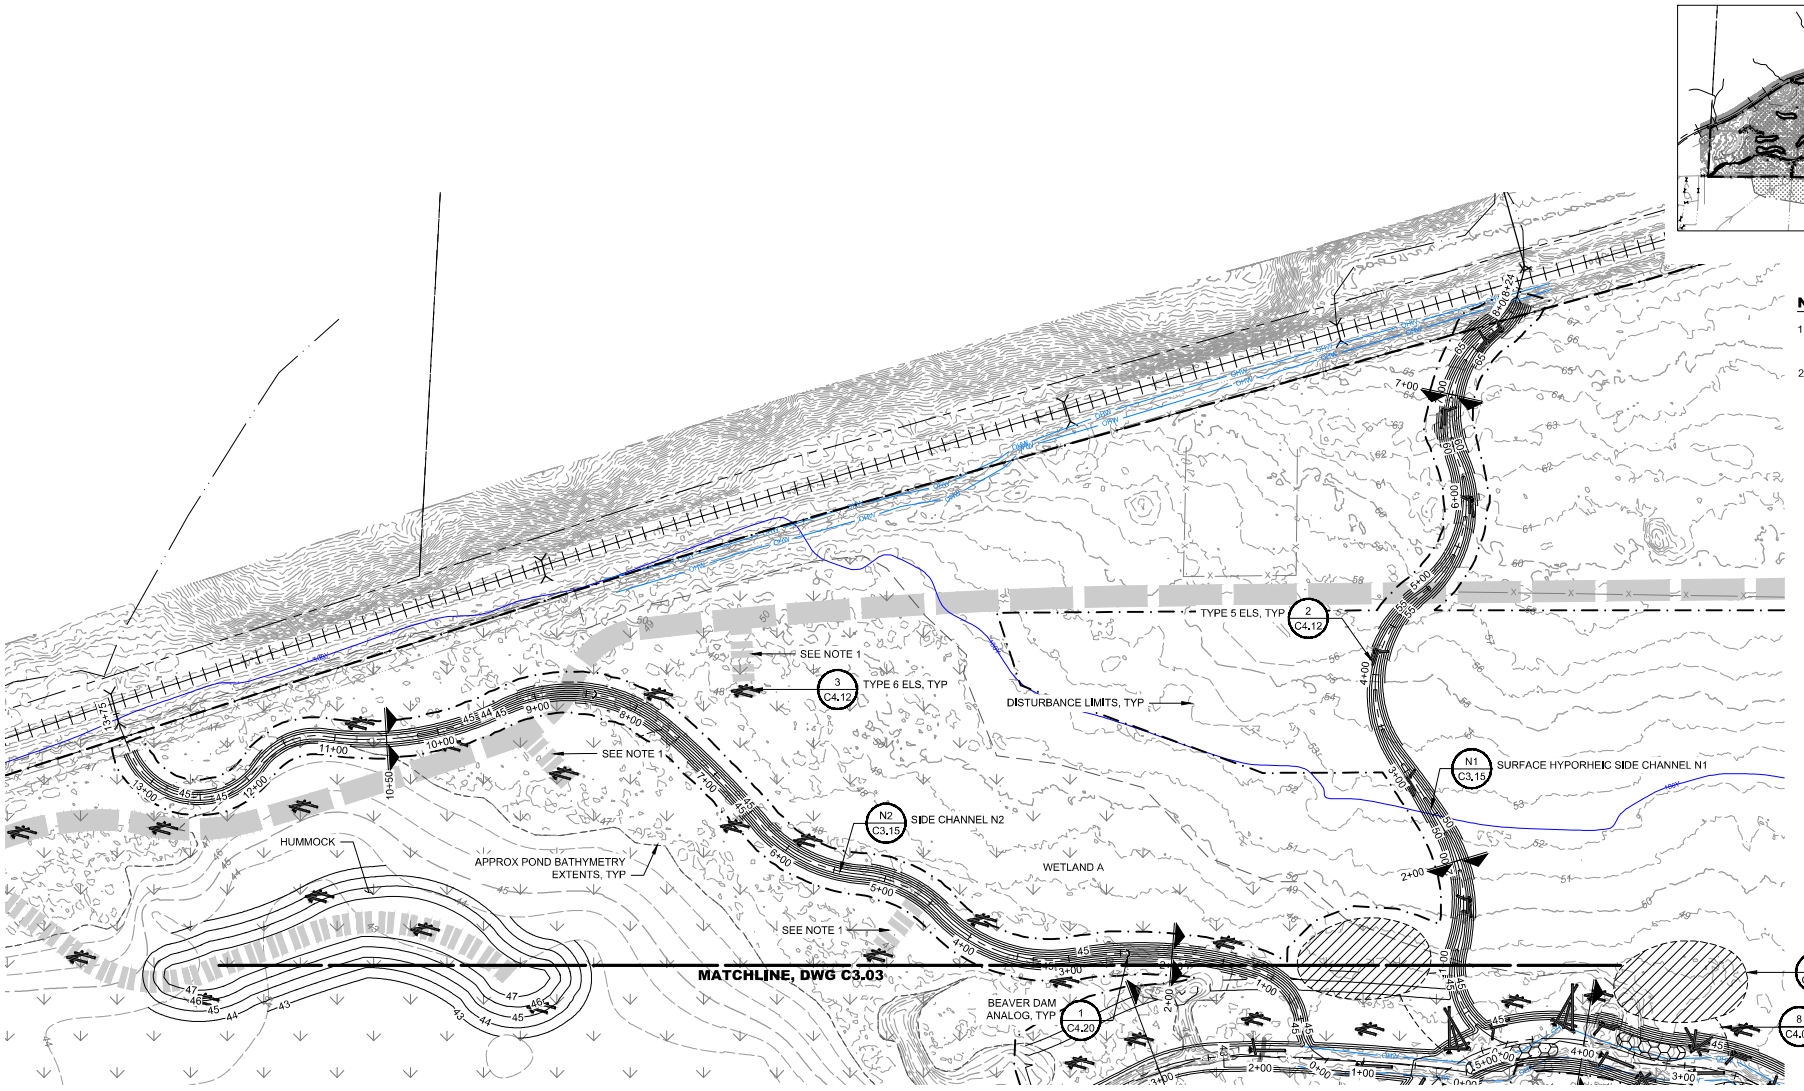

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF NOT ONE INCH SCALE ACCORDINGLY
AT FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

SITE MAP 5

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.05
SHEET NO: 16 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

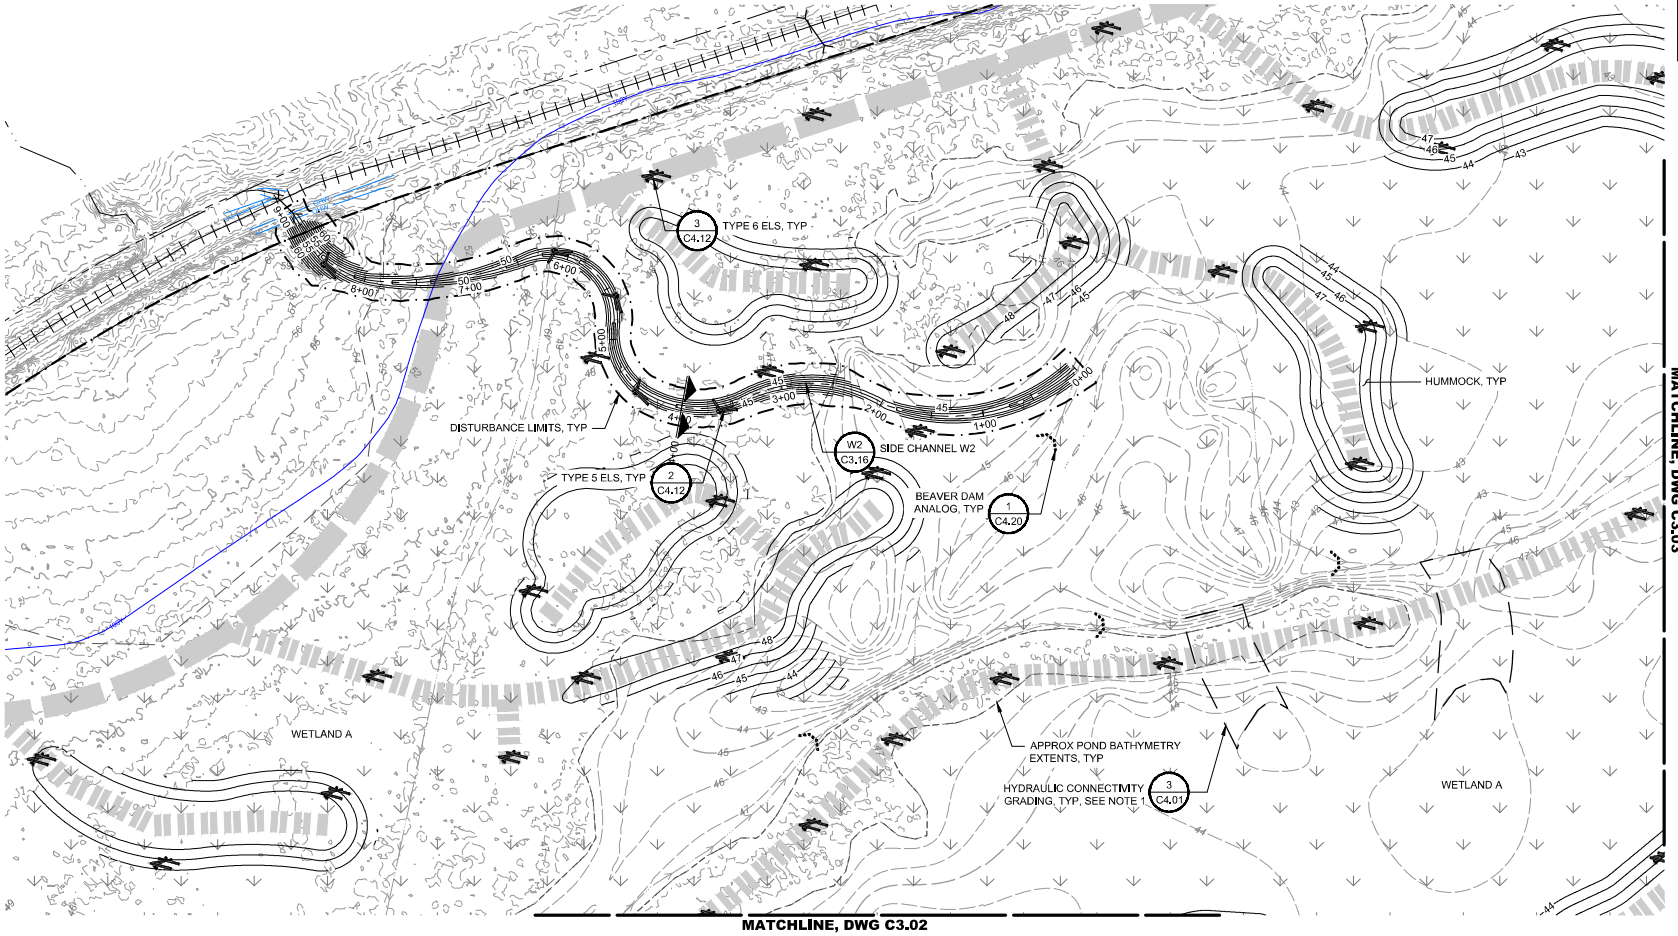

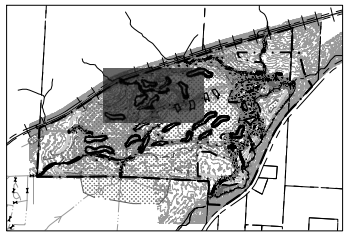

KEY MAP
NTS

NOTES

1. TOPOGRAPHIC CONTOURS FOR THE BATHYMETRY OF THE POND ARE APPROXIMATE AND DO NOT REFLECT THE PRESENCE OF A CENTRAL SUBMERGED DITCH THROUGH THE POND. HYDRAULIC CONNECTIVITY GRADING WILL END AT THE EDGE OF THE SUBMERGED DITCH AND SHOWN GRADING LIMITS ARE APPROXIMATE.
2. SEE DWGS C3.10-C3.17 FOR CHANNEL GRADING PROFILES AND SECTIONS.

60 0 60 120
1"=60'

60PCT DESIGN - NOT FOR CONSTRUCTION

No.	REVISION	BY	APP'D	DATE

ONE INCH
IF FULL SIZE, IF NOT ONE INCH SCALE ACCORDINGLY

CALL 811 BEFORE YOU DIG

DRAFT

DESIGNED: I. MOSTRENKO	DRAWN: E. MARSHALL
DESIGNED: D. CORTESE	DRAWN: -
DESIGNED: -	CHECKED: I. MOSTRENKO
SCALE: AS NOTED	APPROVED: M. EWBANK

SKOOKUM CREEK VALLEY STREAM AND FLOODPLAIN RESTORATION

SKOOKUM RANCH PROJECT

SITE MAP 6

DATE: AUGUST 2026
PROJECT NO: 24-08417-000
DRAWING NO: C3.06
SHEET NO: 17 OF 32

© 2026 Herrera Environmental Consultants, Inc. All rights reserved.

I:\T2-17-1.T2\84-mu24\84117-000\CAD\Sheet\Site.dwg | 9/2/2026 9:39 AM | Erin Kimball